

Thermoelectric cooler




Description

Order Number:	6155325
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Included:	Kondensatablaufstutzen
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus


Technical data

Cooling capacity 95F/95F:	510 BTU
Air volume flow (system / unimpeded):	Ambient air circuit: 70 /153 cfm Cabinet air circuit: 35 / 100 cfm
Operating temperature range:	-4°F - 149°F
UL temperature range:	-20°C - 65°C
Mounting:	External (with frame)
Dimension H x W x D:	19.7 x 13.1 x 7.4 inch
Weight:	42 lbs.
Cut out dimensions:	9.6 x 16.8 inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	0.7 A
Starting current:	1.1 A
Max. current:	0.8 A
Nominal power 95F95F:	170 W
Max. power:	180 W
Fuse:	2 A (T)
Connection:	4 pole power connector 5 pole connector for signals

Performance graph:

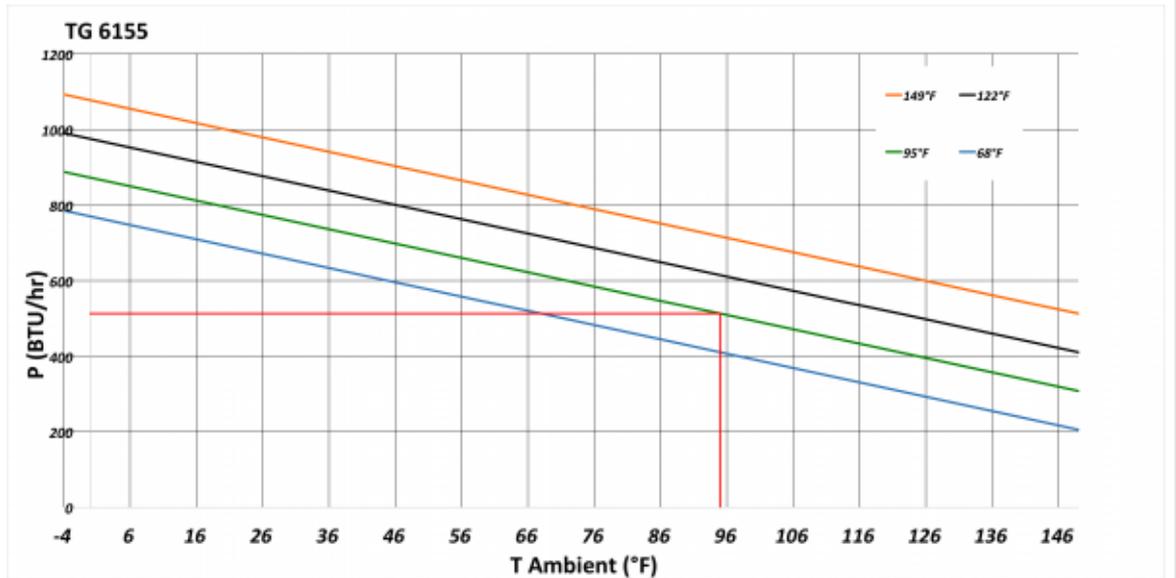

Cut out Dimensions:

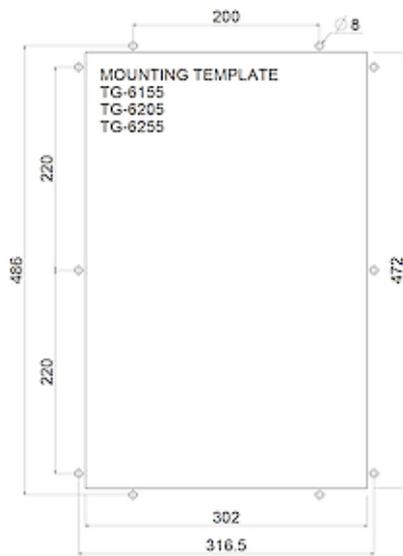

Order Information

Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.	61553254
Verpackungsmaße	586.6 x 354 x 227 mm
Bruttogewicht	22.5 kg
Taric code	84158300