

## Thermoelectric cooler




## Description

<b>Order Number:</b>	6155325
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection to EN 60 529:</b>	IP 66 / UL Type 12, 4, 4X
<b>Included:</b>	Kondensatablaufstutzen
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	510 BTU
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 70 /153 cfm Cabinet air circuit: 35 / 100 cfm
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Mounting:</b>	External (with frame)
<b>Dimension H x W x D:</b>	19.7 x 13.1 x 7.4 inch
<b>Weight:</b>	42 lbs.
<b>Cut out dimensions:</b>	9.6 x 16.8 inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	0.7 A
<b>Starting current:</b>	1.1 A
<b>Max. current:</b>	0.8 A
<b>Nominal power 95F95F:</b>	170 W
<b>Max. power:</b>	180 W
<b>Fuse:</b>	2 A (T)
<b>Connection:</b>	4 pole power connector 5 pole connector for signals

**Performance graph:**

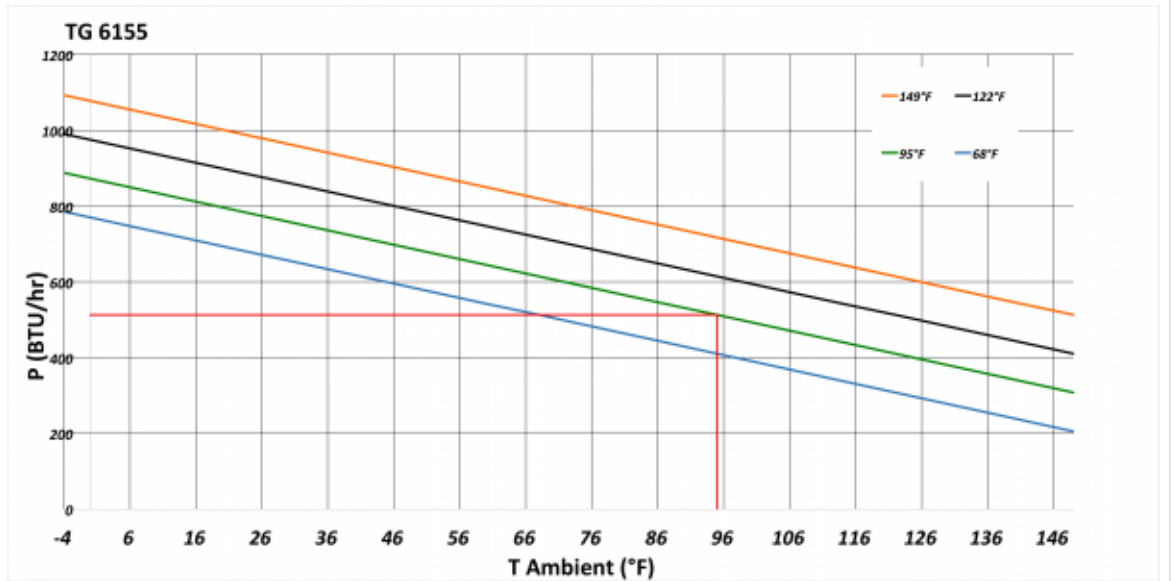

**Cut out Dimensions:**

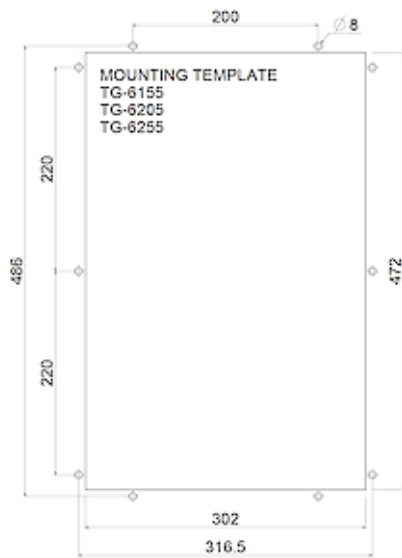

## Order Information

<b>Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.</b>	61553254
<b>Verpackungsmaße</b>	586.6 x 354 x 227 mm
<b>Bruttogewicht</b>	22.5 kg
<b>Taric code</b>	84158300