

## Thermoelectric cooler




## Description

<b>Order Number:</b>	6405325
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Included:</b>	Kondensatablaufstutzen
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	1370 BTU
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 141 / 191 cfm Cabinet air circuit: 141 / 191 cfm
<b>Mounting:</b>	External (with frame)
<b>Dimension H x W x D:</b>	23.6 x 17 x 8 inch
<b>Weight:</b>	82 lbs.
<b>Cut out dimensions:</b>	7.9 x 21.6 inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	2.1 A
<b>Starting current:</b>	3.4 A
<b>Max. current:</b>	2.3 A
<b>Nominal power 95F95F:</b>	490 W
<b>Max. power:</b>	537 W
<b>Fuse:</b>	4 A (T)
<b>Connection:</b>	4 pole power connector 5 pole connector for signals

**Performance graph:**

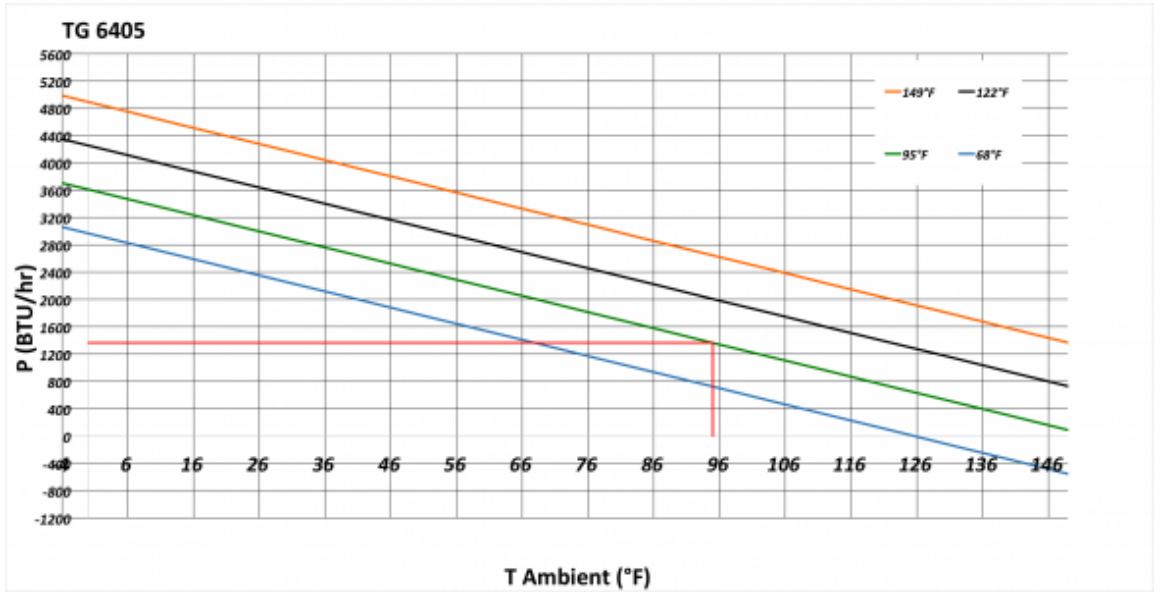

**Cut out dimensions:**

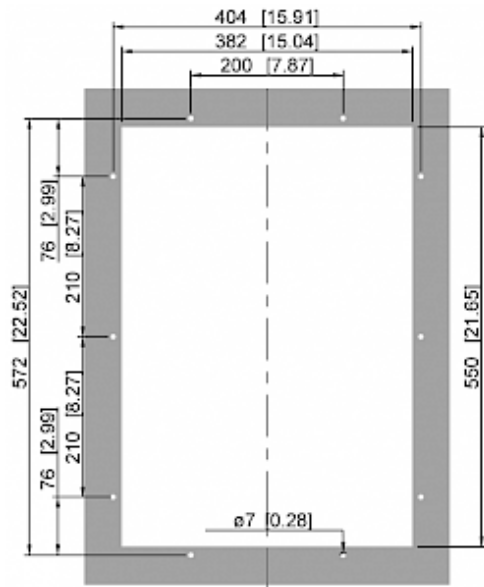

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	64053254
<b>Verpackungsmaße</b>	686.6 x 454 x 232 mm
<b>Bruttogewicht</b>	41 kg
<b>Taric code</b>	84158300