

Roof mounted cooling unit




Description

Order Number:	951220001
Brand Name:	SLIMLINE PRO TOP
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	NEMA 12
Approvals:	CE, cURus

Technical data

Cooling capacity 95F/95F:	1250 W
Cooling capacity 95F/122F:	800 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	183 g / 6.46 oz.
High / low pressure:	32 / 6 bar 464 / 87 psig
Air volume flow (system / unimpeded):	Umgebungskreislauf: 850 m ³ /h Schrankkreislauf: 483 / 850 m ³ /h
Operating temperature range:	5°C - 55°C
Mounting:	Roof mounted
Dimension H x W x D:	412 x 595 x 395 mm
Weight:	41.75 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Current 95F95F:	1.9 A
Starting current:	8.0 A
Max. current:	2.6 A
Nominal power 95F95F:	700 W
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 - poliger Stecker für Stromversorgung 5 - poliger Stecker für Signale 3 - poliger Stecker für RS 485 MODBUS

Cut out Dimensions:

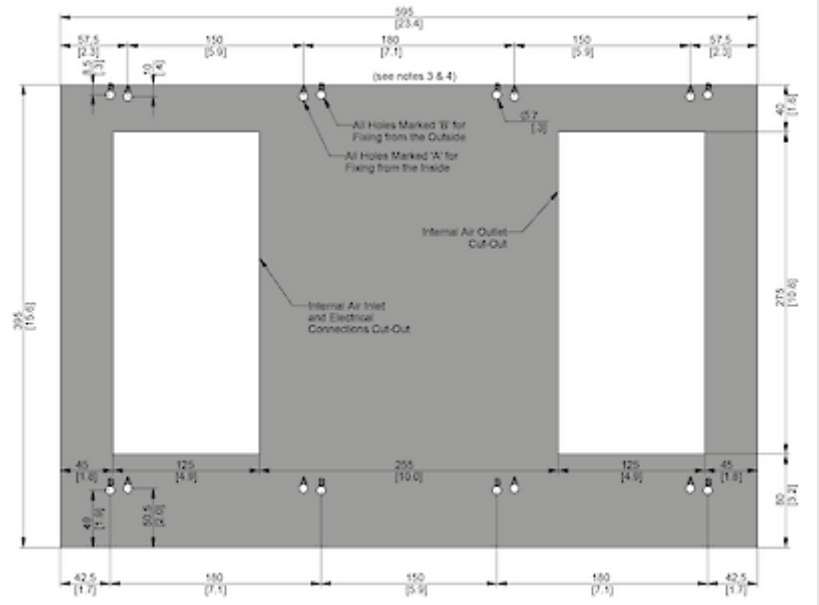

Order Information

Mit Edelstahlgehäuse Bestell Nr.

951220S62

Zolltarifnummer

84158200