

Roof mounted cooling unit




Description

Order Number:	952020001
Brand Name:	SLIMLINE PRO TOP
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	NEMA 12
Approvals:	CE, cURus

Technical data

Cooling capacity 95F/95F:	2100 W
Cooling capacity 95F/122F:	1600 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	424 g. / 15 oz.
High / low pressure:	28 / 6 bar 406 / 88 psi
Air volume flow (system / unimpeded):	Umgebungskreislauf: 1200 ³ /h Schrankkreislauf: 630 m ³ /h
Operating temperature range:	5°C - 55°C
Mounting:	Roof mounted
Dimension H x W x D:	435 x 595 x 475 mm
Weight:	40.1 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 3~
Current 95F95F:	1.8 / 1.9 A
Starting current:	13 A
Max. current:	2.4 A
Nominal power 95F95F:	0.91 / 1.14 kW
Max. power:	1.6 kW
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

Cut out Dimensions:

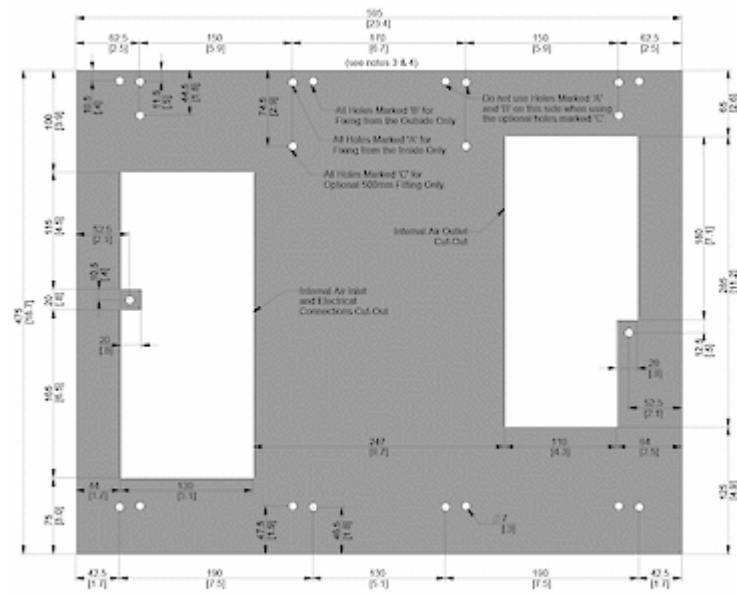

Order Information

Mit Edelstahlgehäuse Bestell Nr.

952020S62

Zolltarifnummer

84158200