

Roof mounted cooling unit




Description

Order Number:	953020001
Brand Name:	SLIMLINE PRO TOP
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	NEMA 12
Approvals:	CE, cURus

Technical data

Cooling capacity 95F/95F:	3200 W
Cooling capacity 95F/122F:	2640 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	490 g / 17.28 oz.
High / low pressure:	28 / 6 bar 406 / 88 psi
Air volume flow (system / unimpeded):	Umgebungskreislauf: 1400 m ³ /h Schrankkreislauf: 1233 m ³ /h
Operating temperature range:	5°C - 55°C
Mounting:	Roof mounted
Dimension H x W x D:	456 x 795 x 575 mm
Weight:	54.2 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 3~
Current 95F95F:	2.9 / 2.9 A
Starting current:	20 A
Max. current:	3.3 A
Nominal power 95F95F:	1.18 / 1.57 kW
Max. power:	2.0 kW
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

Cut out Dimensions:

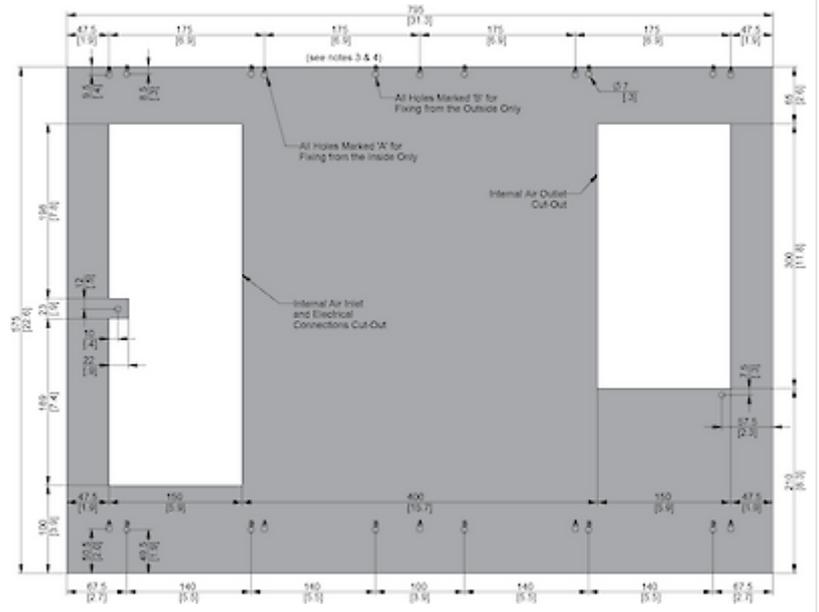

Order Information

Mit Edelstahlgehäuse Bestell Nr.

953020S62

Zolltarifnummer

84158200