

Enclosure air conditioner




Description

| | |
|---|---------------------------|
| Order Number: | 43202081 |
| Brand Name: | COMPACT INDOOR |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection to EN 60 529: | TYPE 12 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 6820 BTU |
| Cooling capacity 95F/122F: | 5630 BTU |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 440 g / 15.5 oz |
| High / low pressure: | 24 / 6 bar 348 / 88 psig |
| Air volume flow (system / unimpeded): | Ambient air circuit: 383 / 706 cfm Cabinet air circuit: 277 / 500 cfm |
| Operating temperature range: | 50°F - 131°F |
| Mounting: | Recessed |
| Dimension H x W x D: | 41 x 17.8 x 10.6 inch |
| Weight: | 97 lbs. |
| Cut out dimensions: | 15.5 x 36.8 inch |
| Voltage / Frequency: | 380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~ |
| UL Voltage / Frequency: | 400/460 V ~ 60 Hz 3~ |
| Current 95F95F: | 3.1 A @ 50 Hz 2.7 A @ 60 Hz |
| Starting current: | 5.7 A / 6.4 A |
| Max. current: | 3.6 A / 3.2 A |
| Nominal power 95F95F: | 1.26 kW @ 400 / 460 V - 50 Hz 1.35 kW @ 400 / 460 V - 60 Hz |
| Max. power: | 1.42 kW |
| Fuse: | 3 x 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |


Performance graph:

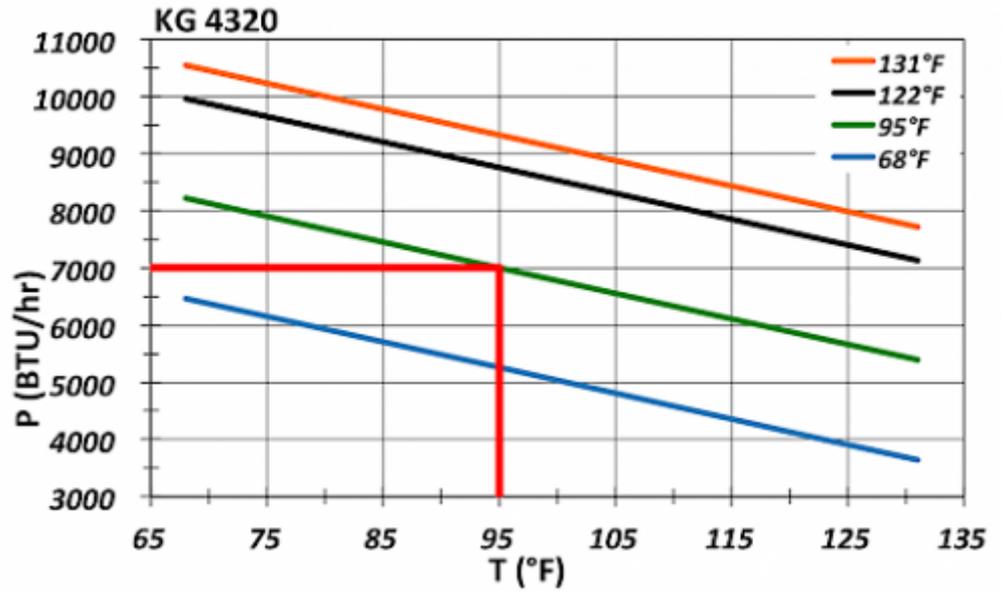

Air flow:

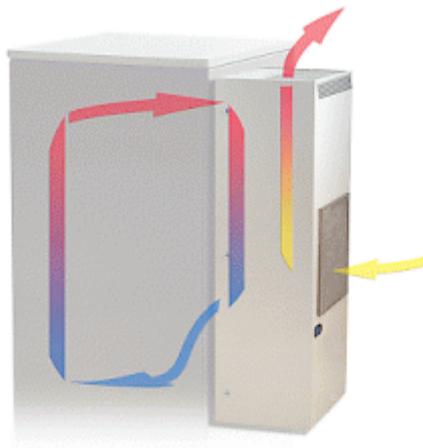

Cut out Dimensions:

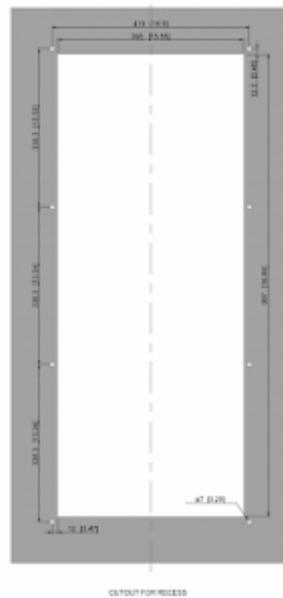

Order Information

| | |
|---|----------|
| Stainless steel housing part no. | 4320202 |
| Taric code | 84158200 |