

## Air to Water Heat Exchanger




### Description

<b>Order Number:</b>	2130210
<b>Brand Name:</b>	SLIMLINE HEX
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection to EN 60 529:</b>	IP 55
<b>Approvals:</b>	CE


## Technical data

<b>Cooling capacity 95F/W50F (53 GPH):</b>	10,750 BTU
<b>Cooling capacity 95F/W50F (132 GPH):</b>	14,160 BTU
<b>Refrigerant / GWP:</b>	Water, light oils or similar
<b>Coolant:</b>	Water, light oils or similar
<b>Air volume flow (system / unimpeded):</b>	723 / 1340 m <sup>3</sup> /h
<b>Operating temperature range:</b>	+34°F - +162°F
<b>Mounting:</b>	Wall mounted / internal
<b>Dimension H x W x D:</b>	37.4 x 15.7 x 7.1 inch
<b>Weight:</b>	37.5 lbs.
<b>Voltage / Frequency:</b>	400 V ~ 50/60 Hz 2~
<b>Starting current:</b>	0.75 / 0.81 A
<b>Max. current:</b>	0.4 / 0.65 A
<b>Max. power:</b>	160 / 240 W
<b>Pressure water circuit:</b>	10 bar
<b>Water connection:</b>	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
<b>Fuse:</b>	2 A (T)
<b>Connection:</b>	3 - pole terminal for alarms 4 - pole terminal for power

**Air flow:**

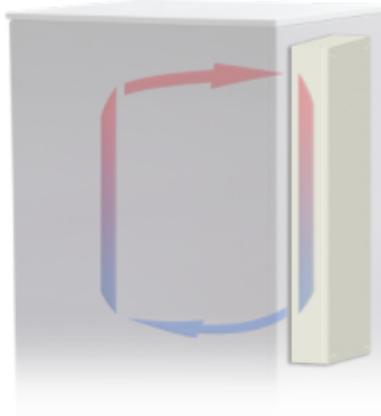

**Cut out Dimensions:**

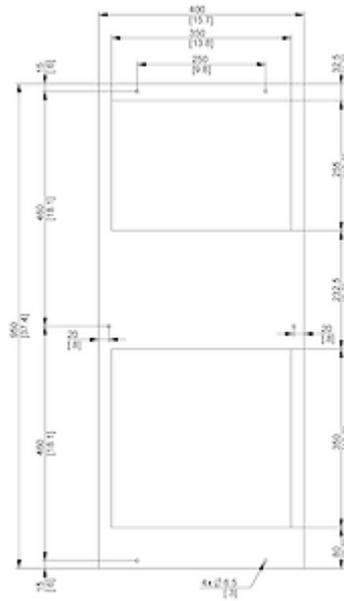

## Order Information

<b>Stainless steel housing part no.</b>	2130212
<b>Mit Magnetventil Bestell Nr.</b>	2130200
<b>Taric code</b>	84158300