

Enclosure air conditioner type 4X



Description

Order Number:	57200182
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	Mit Schaltschrankheizung und Aluminium Filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	6825 BTU
Cooling capacity 95F/122F:	5460 BTU @ 50 Hz 5460 BTU @ 60 Hz
Enclosure heater:	1000 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	522 g / 18.4 oz
High / low pressure:	29 / 6 bar 425 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 385 / 706 cfm Cabinet air circuit: 235 / 500 cfm
Operating temperature range:	-40°F - 131°F
Mounting:	Wall mounted
Dimension H x W x D:	45.2 x 15.5 x 10.6 inch
Weight:	106 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	5.4 A @ 50 Hz 6.8 A @ 60 Hz
Starting current:	28 A
Max. current:	8.6 A
Nominal power 95F95F:	1193 W @ 50 Hz 1491 W @ 60 Hz
Max. power:	1468 W @ 50 Hz 1810 W @ 60 Hz
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	5.0 A
Full load current fans:	0.7 A


Connection:

4-pole terminal block for power


5-pole terminal block for signals

3-pole terminal block for RS 485

Performance graph:

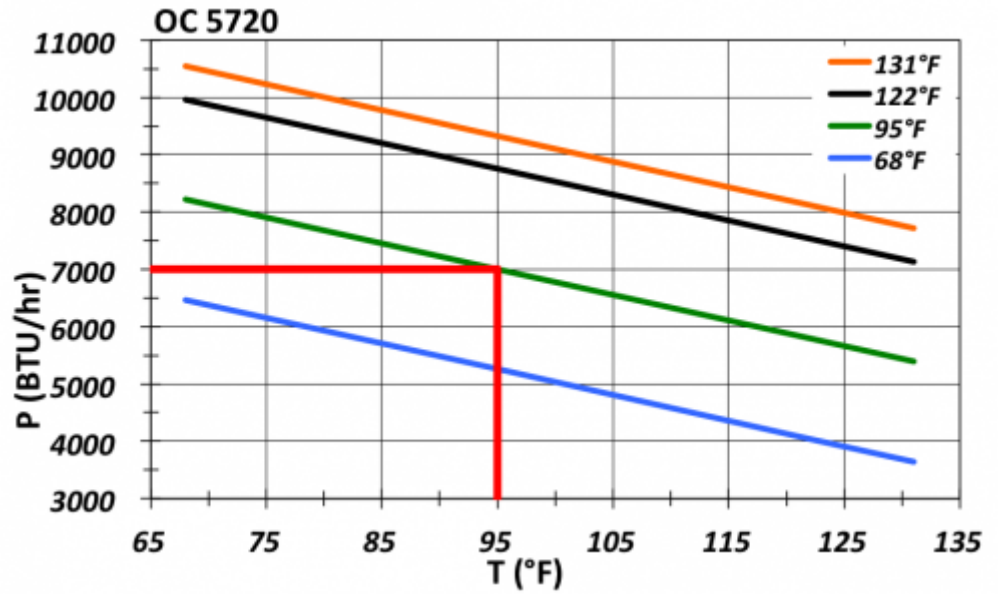

Cut out Dimensions:

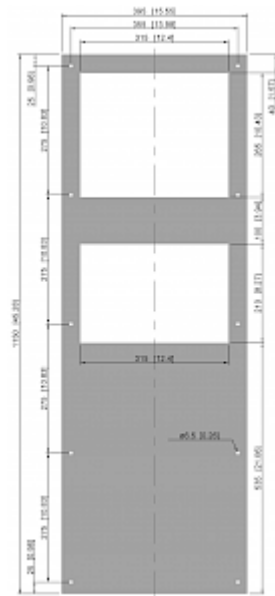

Order Information

In Edelstahl 316 (V4A) Bestell Nr.	57200184
Verpackungsmaße	1,190 x 443 x 310 mm
Bruttogewicht	52 kg
Zolltarifnummer	84158200