

## Enclosure air conditioner type 4X



## Description

<b>Order Number:</b>	57201182
<b>Brand Name:</b>	Compact Outdoor
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection to EN 60 529:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Included:</b>	Mit Schaltschrankheizung und Aluminium Filter
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	cURus (SA32278), cULus (E498756)

## Technical data

<b>Cooling capacity 95F/95F:</b>	6825 BTU
<b>Cooling capacity 95F/122F:</b>	5460 BTU @ 50 Hz 5460 BTU @ 60 Hz
<b>Enclosure heater:</b>	1000 W
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R513A / 630
<b>Refrigerant charge:</b>	522 g / 18.4 oz
<b>High / low pressure:</b>	29 / 6 bar 425 / 88 psig
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 385 / 706 cfm Cabinet air circuit: 235 / 500 cfm
<b>Operating temperature range:</b>	-40°F - 131°F
<b>Mounting:</b>	Wall mounted
<b>Dimension H x W x D:</b>	45.2 x 15.5 x 10.6 inch
<b>Weight:</b>	115 lbs.
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	115 V ~ 60 Hz
<b>Current 95F95F:</b>	10.8 A @ 50 Hz 13.6 A @ 60 Hz
<b>Starting current:</b>	56 A
<b>Max. current:</b>	17.2 A
<b>Nominal power 95F95F:</b>	1193 W @ 50 Hz 1491 W @ 60 Hz
<b>Max. power:</b>	1468 W @ 50 Hz 1810 W @ 60 Hz
<b>Fuse:</b>	25 A (T)
<b>Max circuit ampacity:</b>	20 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	10 A
<b>Full load current fans:</b>	1.5 A

**Connection:**


4-pole terminal block for power

5-pole terminal block for signals


3-pole terminal block for RS 485

---

**Performance graph:**

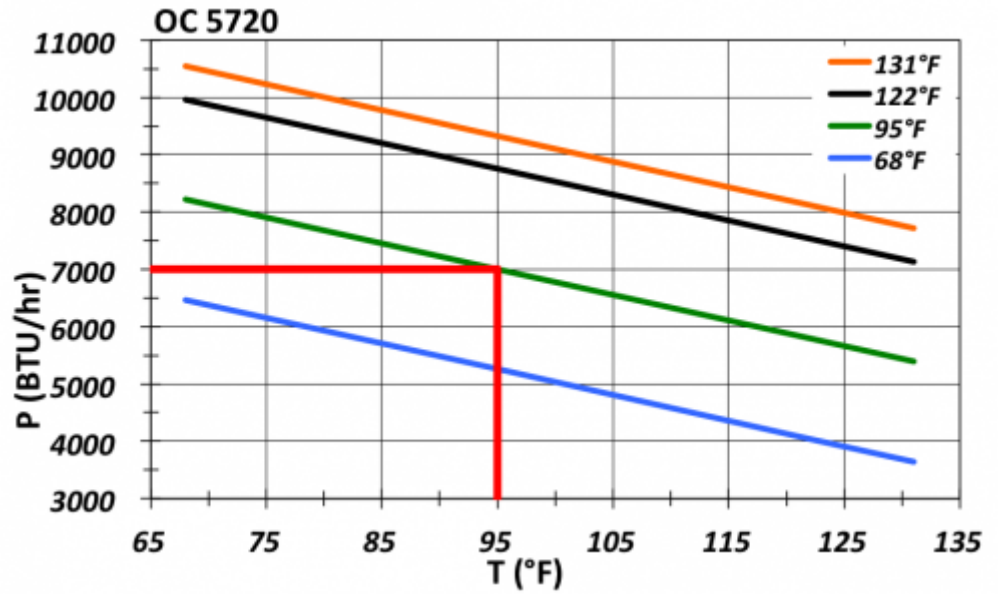

**Cut out Dimensions:**

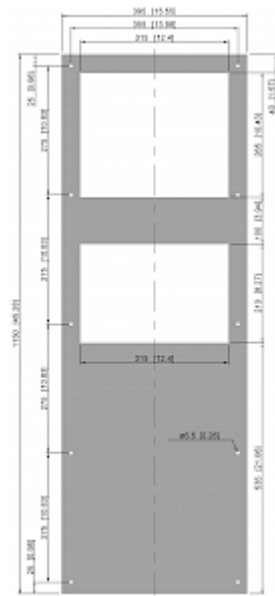

## Order Information

<b>With stainless steel AISI 316 (V4A)</b>	57201184
<b>Verpackungsmaße</b>	1,190 x 443 x 310 mm
<b>Bruttogewicht</b>	55 kg
<b>Zolltarifnummer</b>	84158200