

Air to air heat exchanger



Description


| | |
|----------------------------|---------------------------|
| Order Number: | 580140001 |
| Brand Name: | SLIMLINE HEX |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 54 / NEMA 12 |
| Approvals: | CE, cURus |
| UL File Number: | SA9672 |

Technical data


| | |
|--|--|
| Heat exchanger performance: | 8 W/F |
| Operating temperature range: | 23°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 70 / 177 cfm Cabinet air circuit: 57 / 177 cfm |
| Mounting: | Wall mounted |
| Dimension H x W x D: | 29.5 x 10 x 5.95 inch |
| Weight: | 25 lbs |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Starting current: | 1.3 A |
| Max. current: | 0.6 A |
| Max. power: | 120 W |
| Fuse: | 1 A (T) |
| Connection: | 8 - pin connector |

Performance graph:


T = Temperature difference between ambient and internal temperature
P = Heat exchanger performance

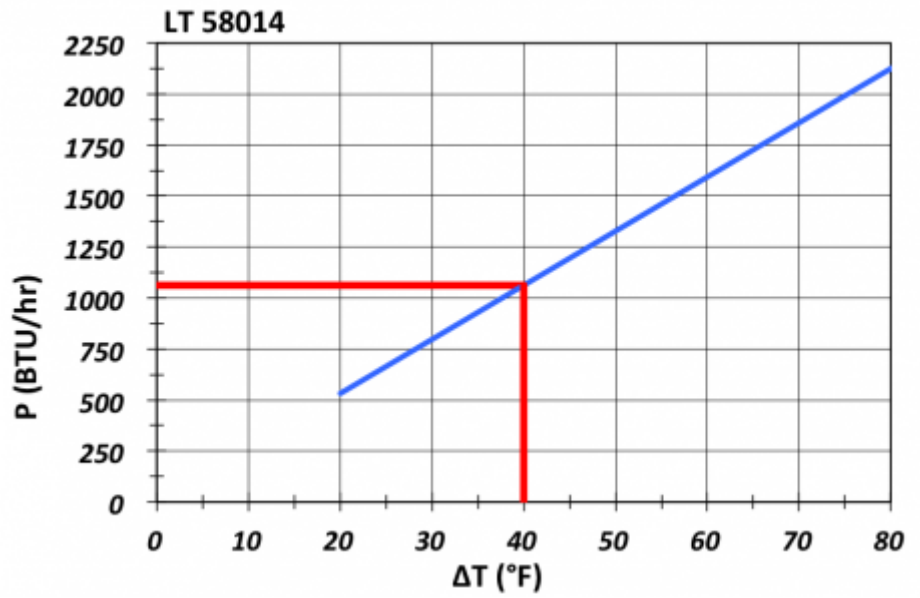

Air flow:

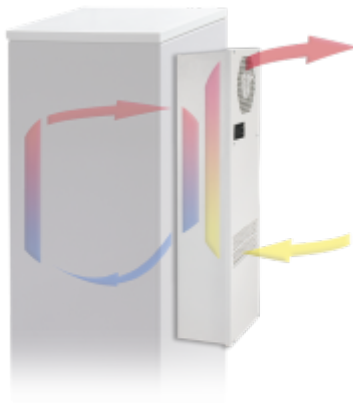

Cut out dimensions:

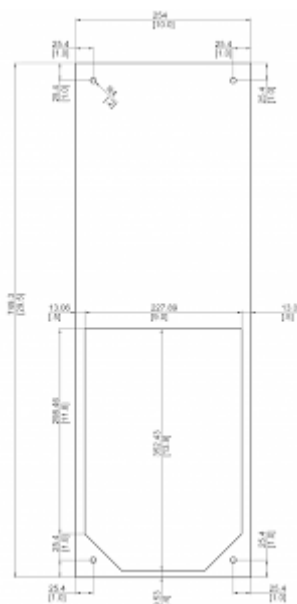

Order Information

| | |
|---|----------------------|
| Stainless steel housing part no. | 58014002 |
| Verpackungsmaße | 852 x 279 x 202.5 mm |
| Bruttogewicht | 13.5 kg |
| Taric code | 84158300 |
| GTIN (EAN) | 5350604200036 |