

Enclosure air conditioner



Description

| | |
|---|---------------------------|
| Order Number: | 850600001 |
| Brand Name: | SLIMLINE PRO |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection to EN 60 529: | Type 3, 3R, 12, 4 |
| Approvals: | CE, cURus, cULus |

Technical data

| | |
|--|---|
| Cooling capacity 95F/95F: | 2285 BTU @ 50 Hz 2320 BTU @ 60 Hz |
| Cooling capacity 95F/122F: | 1740 BTU/hr @ 50 Hz 1825 BTU/hr @ 60 Hz |
| EER 95F95F: | 1.8 / 1.7 |
| Compressor type: | Rotary piston |
| Refrigerant / GWP: | R 513A / 630 |
| Refrigerant charge: | 114 g / 4 oz |
| High / low pressure: | 28 / 6 bar 406 / 88 psi |
| Air volume flow (system / unimpeded): | Ambient air circuit: 117 / 240 cfm Enclosure circuit: 72 / 106 cfm |
| Operating temperature range: | 50°F - 140°F |
| UL temperature range: | 50°F - 131°F |
| Mounting: | Wall mounted / recessed |
| Dimension H x W x D: | 23.7 x 9.9 x 5.4 inch |
| Weight: | 31 lbs. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current 95F95F: | 1.9 A @ 50 Hz 1.9 A @ 60 Hz |
| Starting current: | 5.3 A |
| Max. current: | 2.5 A |
| Nominal power 95F95F: | 380 W @ 50 Hz 390 W @ 60 Hz |
| Max. power: | 560 W |
| Fuse: | 15 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 1.6 A |
| Full load current fans: | 0.2 A |


Connection:

4 pole terminal block for power

5 pole terminal block for signals

3 pole terminal block for RS 485

Cut out Dimensions:

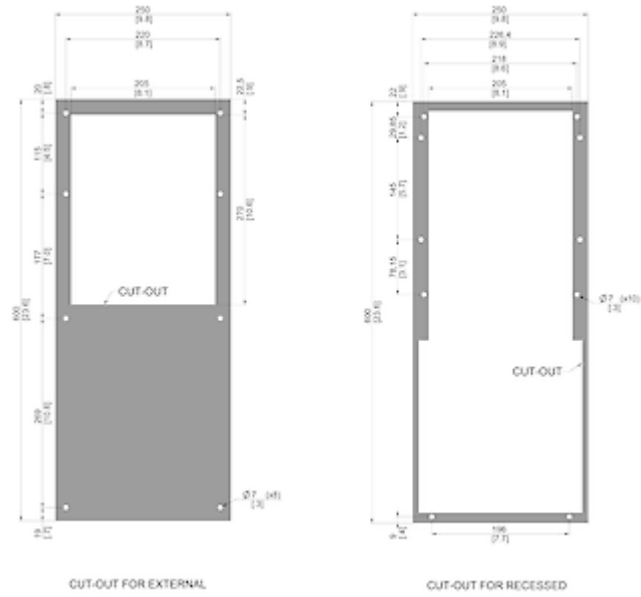

Order Information

| | |
|-----------------------|--------------------|
| Box dimensions | 692 x 285 x 192 mm |
| Gross weight | 16 Kg |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604390027 |