

Enclosure air conditioner




Description

Order Number:	43042001
Brand Name:	COMPACT INDOOR
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	1230 BTU
Cooling capacity 95F/122F:	750 BTU
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	79 g / 2.78 oz
High / low pressure:	25 / 6 bar 365 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 53 / 147 cfm Cabinet air circuit: 68 / 80 cfm
Operating temperature range:	68°F - 131°F
Mounting:	External
Dimension H x W x D:	19.75 x 11.02 x 7.87 in.
Weight:	57 lbs.
Cut out dimensions:	18.90 x 9.45 in.
Voltage / Frequency:	400/460 V ~ 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current 95F95F:	1.1 A @ 50 Hz 1.0 A @ 60 Hz
Starting current:	3.8 A
Max. current:	1.4 A
Nominal power 95F95F:	440 W
Max. power:	550 W
Fuse:	2 x 3.6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

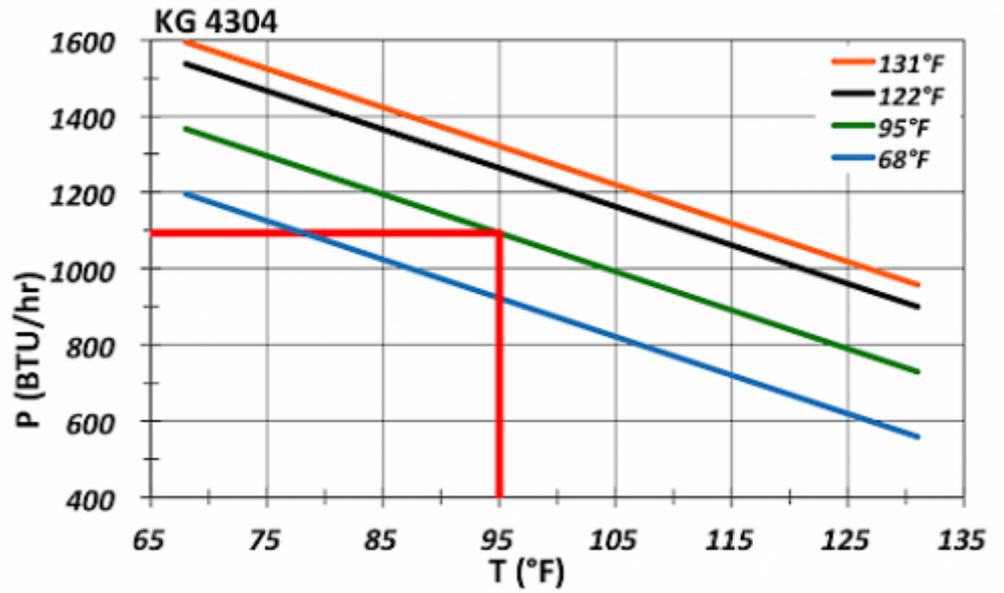

Air flow:

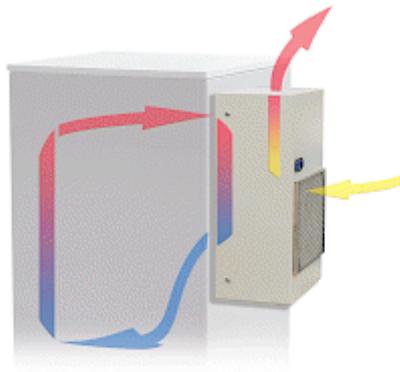

Cut out Dimensions:

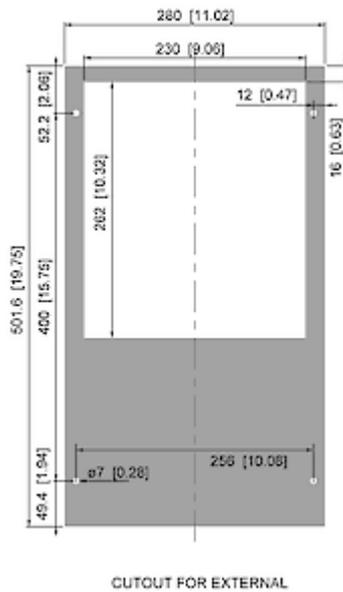

Order Information

Stainless steel housing part no.	4304202
Verpackungsmaße	535 x 323 x 225 mm
Bruttogewicht	27 kg
Taric code	84158200