

Enclosure air conditioner




Description

Order Number:	43092001
Brand Name:	COMPACT INDOOR
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	3000 BTU
Cooling capacity 95F/122F:	2270 BTU
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	194 g / 6.84 oz
High / low pressure:	29.5 / 6 bar 425 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 256 / 324 cfm Cabinet air circuit: 118 / 147 cfm
Operating temperature range:	50°F - 131°F
Mounting:	External
Dimension H x W x D:	25.6 x 12.4 x 10.2 inch
Weight:	79 lbs.
Cut out dimensions:	25.00 x 10.83 in.
Voltage / Frequency:	400 / 460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current 95F95F:	2.2 A @ 50 Hz 1.9 A @ 60 Hz
Starting current:	5.1 A
Max. current:	2.5 A
Nominal power 95F95F:	650 W @ 50 Hz 750 W @ 60 Hz
Max. power:	970 W
Fuse:	2 x 3.6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

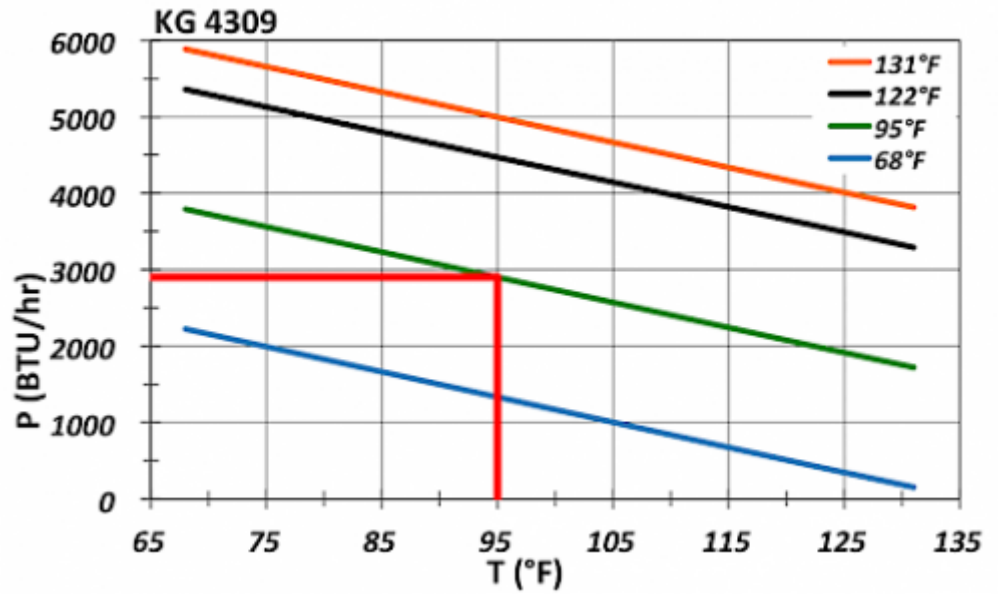

Air flow:

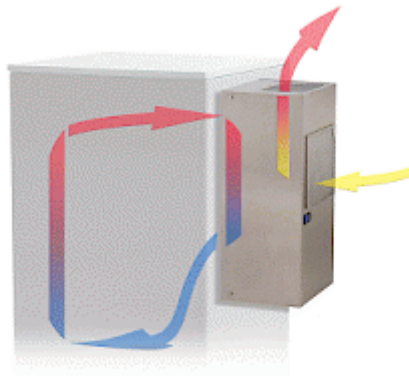

Cut out Dimensions:

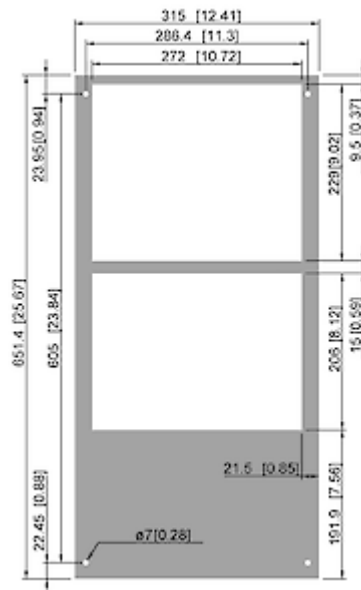

Order Information

Stainless steel housing part no.	4309202
Mit Kondensatverdunstung Bestell Nr.	43092101
Verpackungsmaße	685 x 353 x 295 mm
Bruttogewicht	37.5 kg
Taric code	84158200