

## Air / Water Heat Exchanger



### Description


<b>Order Number:</b>	2125000
<b>Brand Name:</b>	SLIMLINE HEX
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection to EN 60 529:</b>	NEMA 12
<b>Note:</b>	Mit Magnetventil
<b>Approvals:</b>	CE

## Technical data

<b>Cooling capacity 95F/W50F (53 GPH):</b>	8530 BTU
<b>Cooling capacity 95F/W50F (132 GPH):</b>	10750 BTU (only w/o water flow regulator)
<b>Coolant:</b>	Water, light oils or similar
<b>Air volume flow (system / unimpeded):</b>	294 / 692 cfm @ 50 Hz 311 / 765 cfm @ 60 Hz
<b>Operating temperature range:</b>	+34°F - +162°F
<b>Mounting:</b>	Wall mounted / Internal
<b>Dimension H x W x D:</b>	36.85 x 10.31 x 5.77 in.
<b>Weight:</b>	39.68 lbs
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Starting current:</b>	1.2 A / 1.3 A
<b>Max. current:</b>	0.7 A / 0.9 A
<b>Max. power:</b>	200 W
<b>Pressure water circuit:</b>	10 bar
<b>Water connection:</b>	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
<b>Fuse:</b>	5 A (T)
<b>Connection:</b>	Connection terminals

**Performance graph:**


$\Delta T$  = Temperature difference between enclosure air and coolant  
 P = Cooling Capacity

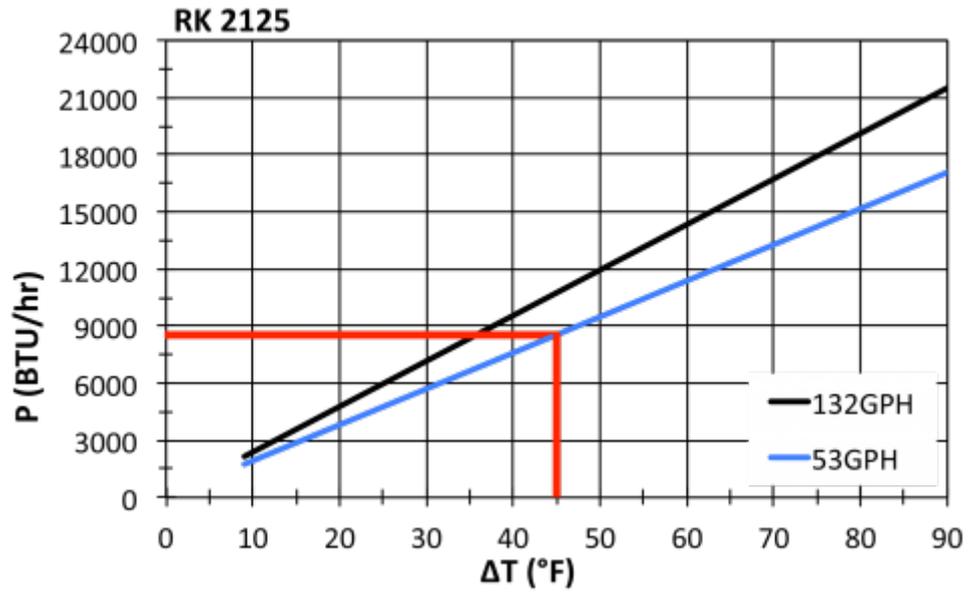

**Air flow:**



**Cut out Dimensions:**

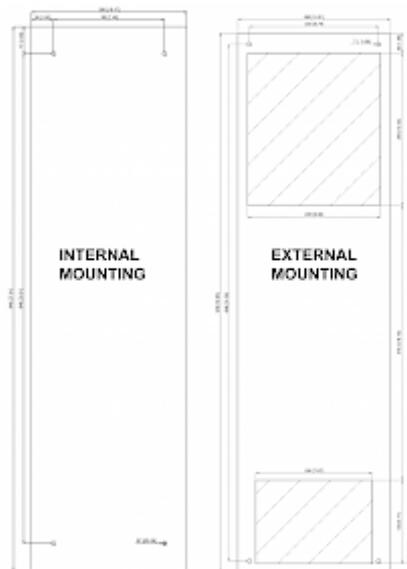

## Order Information

<b>Verpackungsmaße</b>	1033.6 x 279 x 183.5 mm
<b>Bruttogewicht</b>	21 kg
<b>Zolltarifnummer</b>	84158300
<b>EAN Nummer</b>	5350604210783