

## Filterlüfter



## Description


<b>Order Number:</b>	4883A4000
<b>Brand Name:</b>	SOLIFLEX
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	ABS Plastic
<b>Ingress protection:</b>	IP 54, Type 12
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	E498756

## Technical data


<b>Operating temperature range:</b>	14°F - 131°F
<b>Air volume flow unimpeded:</b>	483 cfm - 547 cfm
<b>Dimension H x W x D:</b>	12.8 x 12.8 x 6.3 inch
<b>Cut out dimensions:</b>	11.45 x 11.45 inch (+0.06)
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.55 / 0.74 A
<b>Power consumption:</b>	125 / 166 W
<b>Wall thickness:</b>	0.06 - 0.10 inch
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips
<b>Noise level:</b>	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz

**Air flow:**

Q = Air flow [cfm]  
P = Static pressure [inH2O]

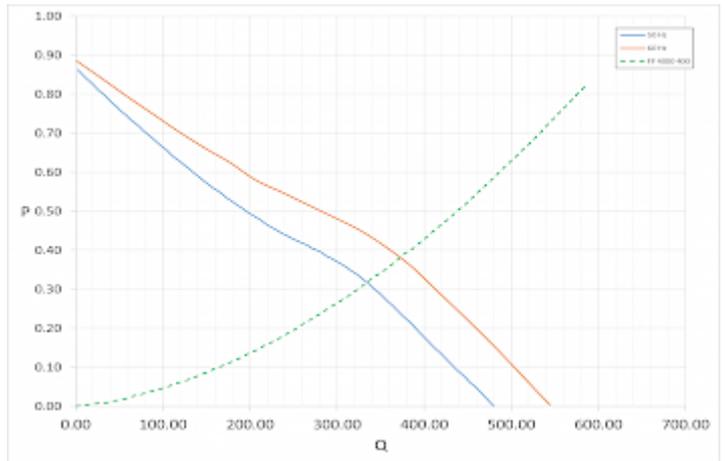

**Cut out dimensions:**

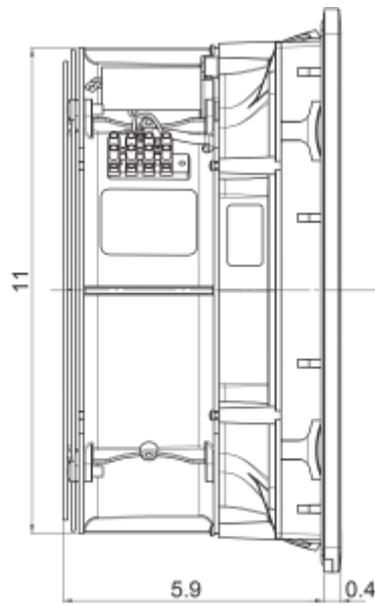

## Order Information

<b>In RAL 9005</b>	4883A4003
<b>Mit TYPE 3R Schutzklasse Art.-Nr.</b>	4883A4033
<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100794