

## Enclosure air conditioner



## Description

<b>Order Number:</b>	852020S62
<b>Brand Name:</b>	SLIMLINE PRO
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection to EN 60 529:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Optional:</b>	With 1,000 W enclosure heater order no. 852021001
<b>Approvals:</b>	CE, cURus, cULus

## Technical data

<b>Cooling capacity 95F/95F:</b>	4625 BTU @ 50 Hz 4625 BTU @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	5800 BTU @ 50 Hz 5980 BTU @ 60 Hz
<b>EER 95F95F:</b>	2.0
<b>Compressor type:</b>	Rotary Piston
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	373 g / 13.2 oz
<b>High / low pressure:</b>	30 / 6 bar 435 / 88 psig
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 400 / 706 cfm Cabinet air circuit: 294 / 500 cfm
<b>Operating temperature range:</b>	50°F - 140°F
<b>UL temperature range:</b>	50°F - 140°F
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimension H x W x D:</b>	53.2 x 15.6 x 8.3 inch
<b>Weight:</b>	101 lbs.
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>UL Voltage / Frequency:</b>	460 V / 60Hz 3~
<b>Current 95F95F:</b>	1.9 A @ 50 Hz 2.0 A @ 60 Hz
<b>Starting current:</b>	8 A
<b>Max. current:</b>	2.4 A
<b>Nominal power 95F95F:</b>	980 W @ 50 Hz 1240 W @ 60 Hz
<b>Max. power:</b>	1650 W
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	1.3 A

**Full load current fans:**

1.3 A


---

**Connection:**


4 pole terminal block for power  
5 pole terminal block for signals  
3 pole terminal block for RS 485

---

**Performance graph:**

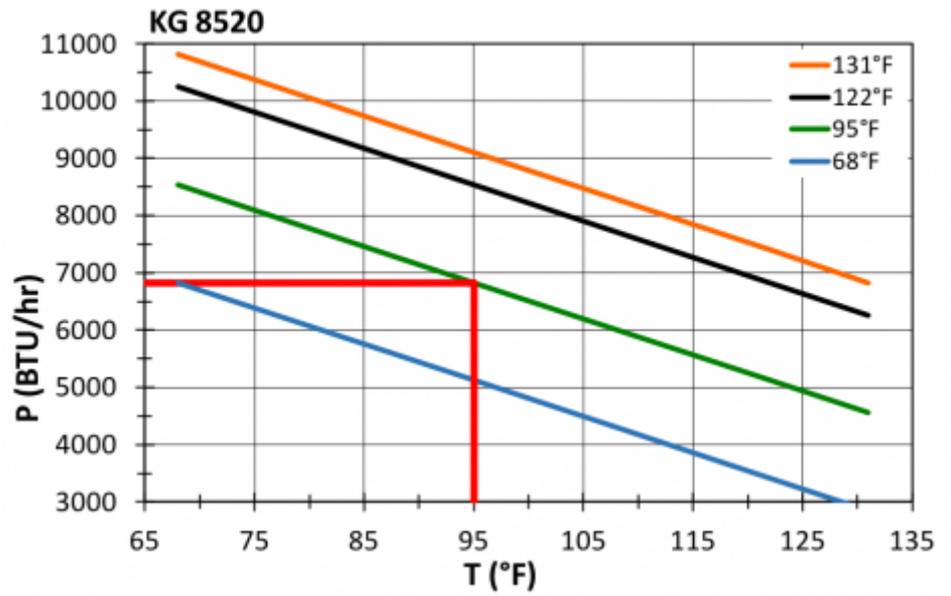

**Cut out Dimensions:**

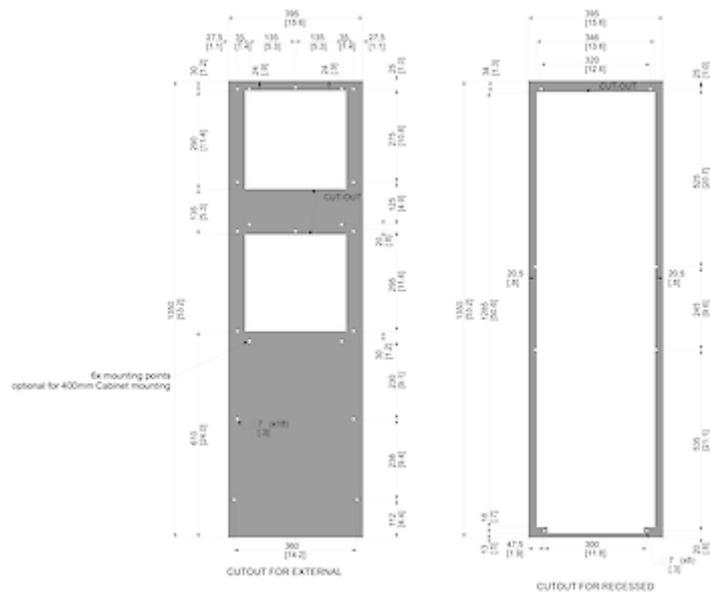

## Order Information

<b>Verpackungsmaße</b>	1042 x 405 x 242 mm
<b>Bruttogewicht</b>	54 Kg
<b>Zolltarifnummer</b>	84158200