

## Filter fan SF 4732 - 230V




### Description

<b>Order Number:</b>	4732052501
<b>Brand Name:</b>	SOLIVENT PRO
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	PC plastic
<b>Ingress protection to EN 60 529:</b>	IP 54
<b>UL Typ (UL 50E):</b>	12
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	E498756


## Technical data

<b>Air flow unimpeded IP 54:</b>	409.4 / 421.8 CFM
<b>Air flow with exhaust filter IP 54:</b>	265 / 265 CFM
<b>Operating temperature range:</b>	14°F- 131°F
<b>Storage temperature range:</b>	-40°F- 158°F
<b>Mounting:</b>	Wall mounted
<b>Dimension H x W x D:</b>	12.82 × 12.82 × 6.50 inches
<b>Weight:</b>	10.58 lbs.
<b>Cut out dimensions:</b>	11.5 x 11.5 inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.35 / 0.50 A
<b>Power consumption:</b>	80 / 110 W
<b>Wall thickness:</b>	0.039 - 0.118 inch
<b>Noise level:</b>	61 dB(A)
<b>Fuse:</b>	1 A (T)
<b>Connection:</b>	Spring terminal


**Air flow:**

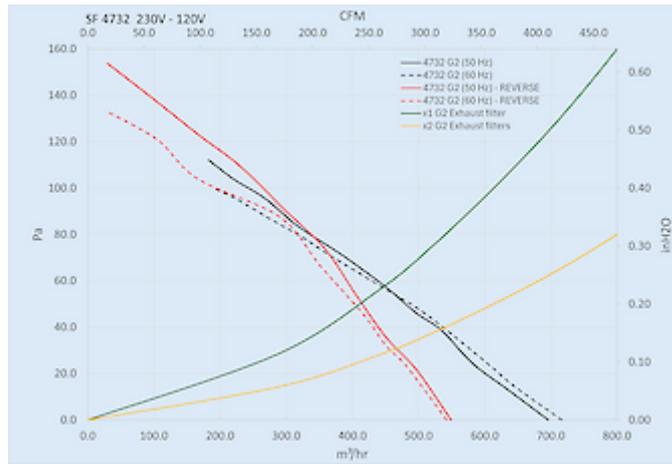

**Cooling capacity:**

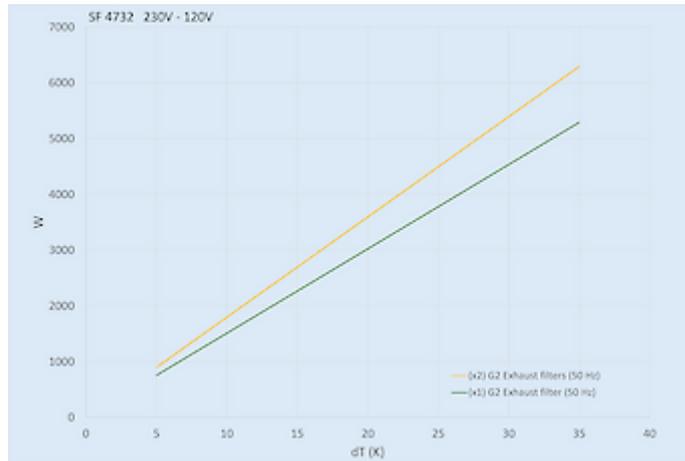

**Cut out Dimensions:**

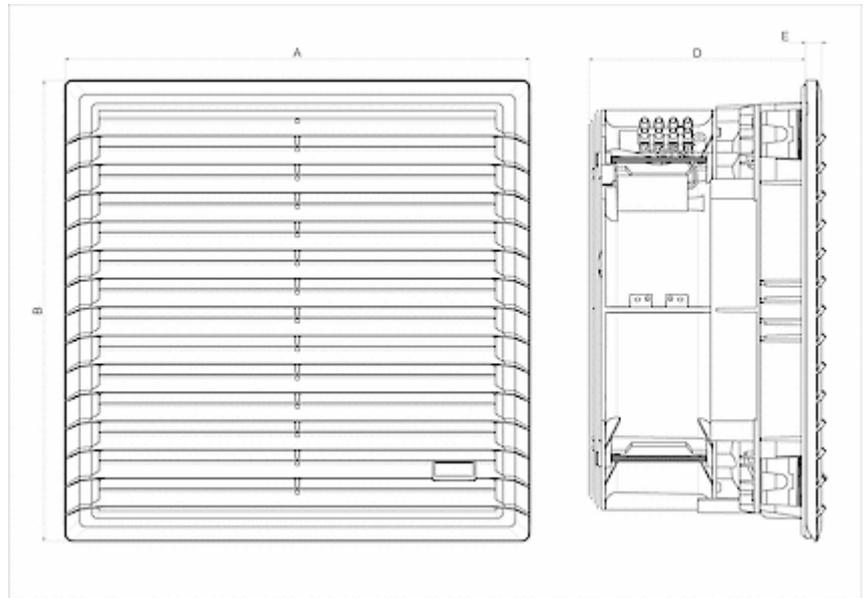

## Order Information

Order number	IP rating	UL Type	RAL colour	Flow type <sup>1)</sup>	Air flow (m <sup>3</sup> /h) <sup>2)</sup>	Air flow with exhaust filter (m <sup>3</sup> /h)
4732052501	54	12 / 3R	RAL 7035	B	696 / 717 m <sup>3</sup> /hr	450 / 450 m <sup>3</sup> /hr
4732052503	54	12 / 3R	RAL 9005	B	696 / 717 m <sup>3</sup> /hr	450 / 450 m <sup>3</sup> /hr
473205R2501	54	12 / 3R	RAL 7035	S	549 / 542 m <sup>3</sup> /hr	N/A
473205R2503	54	12 / 3R	RAL 9005	S	549 / 542 m <sup>3</sup> /hr	N/A

<sup>1)</sup> B = Blowing - from ambient into the enclosure (standard version)  
 S = Suction - from enclosure to ambient (on request)

<sup>2)</sup> unimpeded 50/60 Hz