

Outdoor Filter fan SF 4732 - 230V




Description

Order Number:	4732052503
Brand Name:	SOLIVENT PRO
Color:	RAL 9005
Housing Material:	PC plastic
Ingress protection to EN 60 529:	IP 54
UL Typ (UL 50E):	12, 3R
Approvals:	CE, cURus, cULus
UL File Number:	E498756


Technical data

Air flow unimpeded IP 54:	409.4 / 421.8 CFM
Air flow with exhaust filter IP 54:	265 / 265 CFM
Operating temperature range:	-40°F - 158°F
Storage temperature range:	-40°F- 158°F
Mounting:	Wall mounted
Dimension H x W x D:	12.82 × 12.82 × 6.50 inches
Weight:	10.58 lbs.
Cut out dimensions:	11.5 x 11.5 inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.35 / 0.50 A
Power consumption:	80 / 110 W
Wall thickness:	0.039 - 0.118 inch
Noise level:	61 dB(A)
Fuse:	1 A (T)
Connection:	Spring terminal


Air flow:

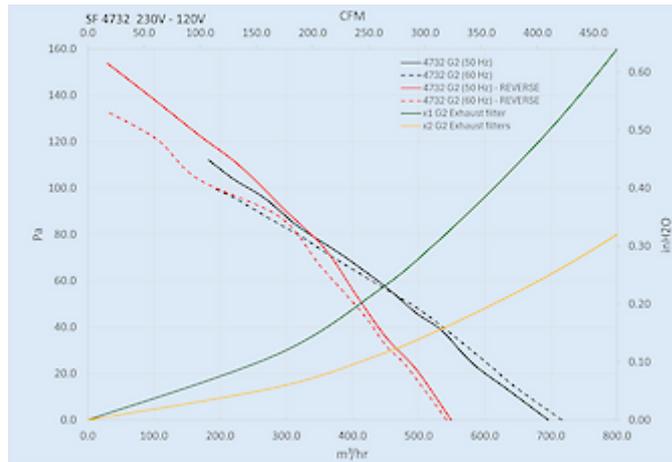

Cooling capacity:

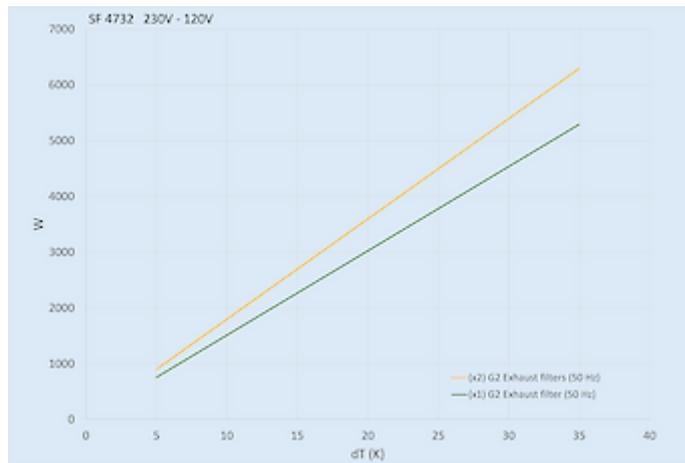

Cut out Dimensions:

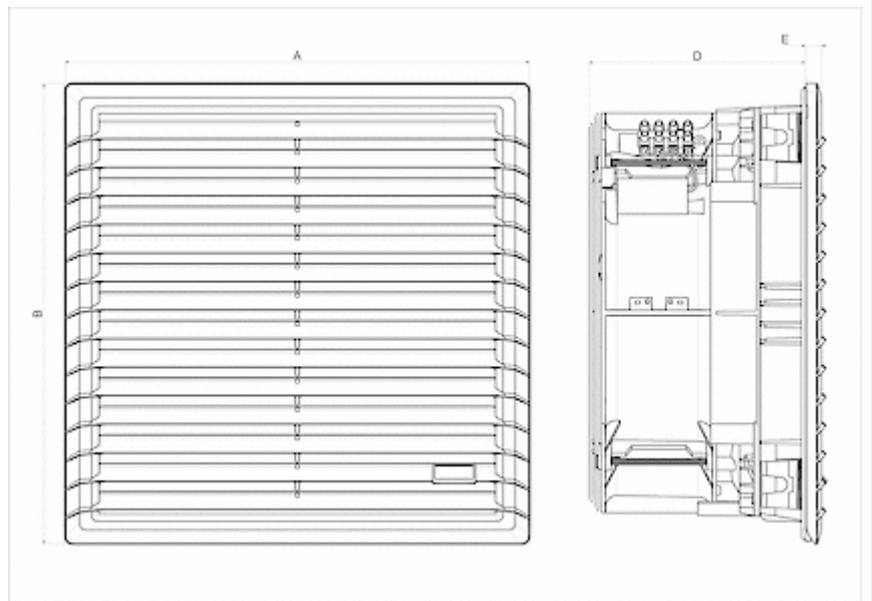

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4732052501	54	12 / 3R	RAL 7035	B	696 / 717 m ³ /hr	450 / 450 m ³ /hr
4732052503	54	12 / 3R	RAL 9005	B	696 / 717 m ³ /hr	450 / 450 m ³ /hr
473205R2501	54	12 / 3R	RAL 7035	S	549 / 542 m ³ /hr	N/A
473205R2503	54	12 / 3R	RAL 9005	S	549 / 542 m ³ /hr	N/A

¹⁾ B = Blowing - from ambient into the enclosure (standard version)
 S = Suction - from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz