

Outdoor filter fan SF 4732 - 400V




Description

Order Number:	4732282503
Brand Name:	SOLIVENT PRO
Color:	RAL 9005
Housing Material:	PC plastic
Ingress protection to EN 60 529:	IP 54
UL Typ (UL 50E):	12, 3R
Approvals:	CE, cURus, cULus
UL File Number:	E498756


Technical data

Air flow unimpeded IP 54:	331 / 379 CFM
Air flow with exhaust filter IP 54:	232 / 268 CFM
Operating temperature range:	-40°F - 158°F
Storage temperature range:	-40°F- 158°F
Mounting:	Wall mounted
Dimension H x W x D:	12.82 × 12.82 × 6.50 inches
Weight:	10.58 lbs.
Cut out dimensions:	11.5 x 11.5 inch
Voltage / Frequency:	400V-50 Hz 3~ / 460V-60 Hz 3~
Rated current:	0.20 / 0.23 A
Power consumption:	110 / 145 W
Wall thickness:	0.039 - 0.118 inch
Noise level:	67 dB(A)
Fuse:	3 x 1 A (T)
Connection:	Spring terminal


Air flow:

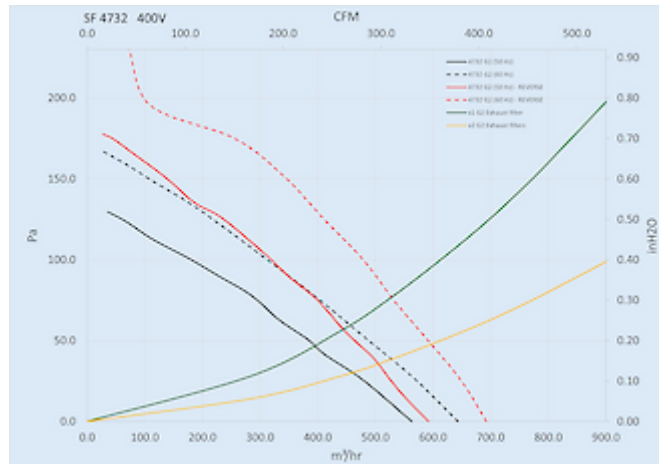

Cooling capacity:

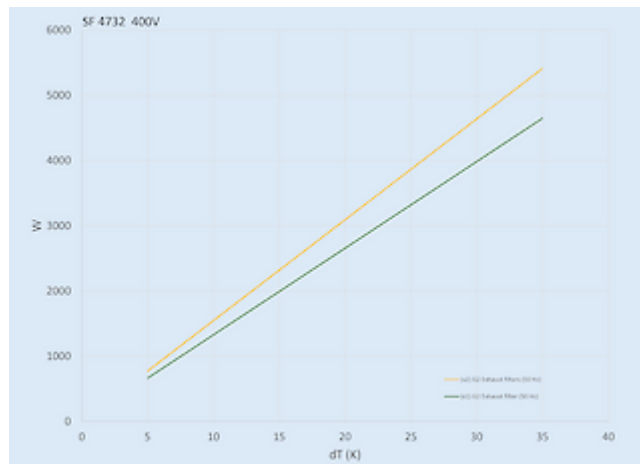

Cut out Dimensions:

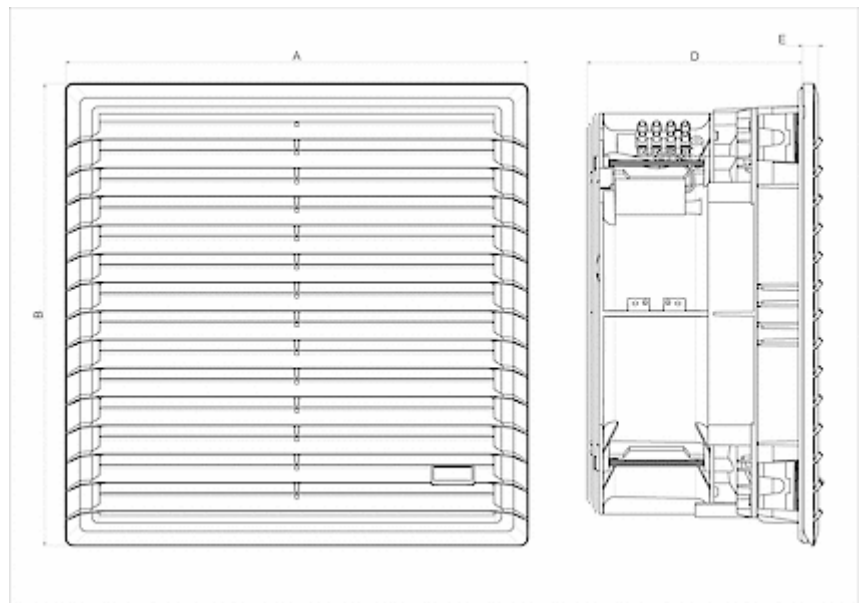

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4732282501	54	12 / 3R	RAL 7035	B	563 / 643 m ³ /hr	395 / 455 m ³ /hr
4732282501	54	12 / 3R	RAL 9005	B	563 / 643 m ³ /hr	395 / 455 m ³ /hr
473218R2501	54	12 / 3R	RAL 7035	S	592 / 693 m ³ /hr	N/A
473218R2503	54	12 / 3R	RAL 9005	S	592 / 693 m ³ /hr	N/A

¹⁾ B = Blowing - from ambient into the enclosure (standard version)
 S = Suction - from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz