

Enclosure air conditioner



Description

| | |
|----------------------------|---|
| Order Number: | 841210001 |
| Brand Name: | SLIMLINE PRO |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 55 / Type 12 |
| Note: | Hat denselben Schaltschrankausbruch wie KG 8508 und KG 8512 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 5120 BTU @ 50 Hz 5290 BTU @ 60 Hz |
| Cooling capacity 95F/122F: | 4330 BTU @ 50 Hz 4540 BTU @ 60 Hz |
| EER 95F95F: | 2.20 |
| Compressor type: | Rotary piston |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 267 g / 9.4 oz. |
| High / low pressure: | 30 / 6 bar 435 / 88 psi |
| Operating temperature range: | 50°F - 140°F |
| UL temperature range: | 50°F - 140°F |
| Air volume flow (system / unimpeded): | Ambient: 323 / 500 m ³ /h Enclosure: 206 / 500 m ³ /h |
| Mounting: | Wall mounted / recessed |
| Dimension H x W x D: | 37.5 x 15.6 x 9.9 inch |
| Weight: | 99 lbs |
| Voltage / Frequency: | 120 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 120 V ~ 60 Hz |
| Current 95F95F: | 6.4 A @ 50 Hz 7.2 A @ 60 Hz |
| Starting current: | 32 A |
| Max. current: | 9.4 A |
| Nominal power 95F95F: | 680 W @ 50 Hz 830 W @ 60 Hz |
| Max. power: | 1.1 kW |
| Fuse: | 15 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 5 A |

Full load current fans: 1.5 A

Connection: 4 - poliger Stecker für Versorgungsspannung
5 - poliger Stecker für Signale
3 - poliger Stecker für RS 485

Cut out dimensions:

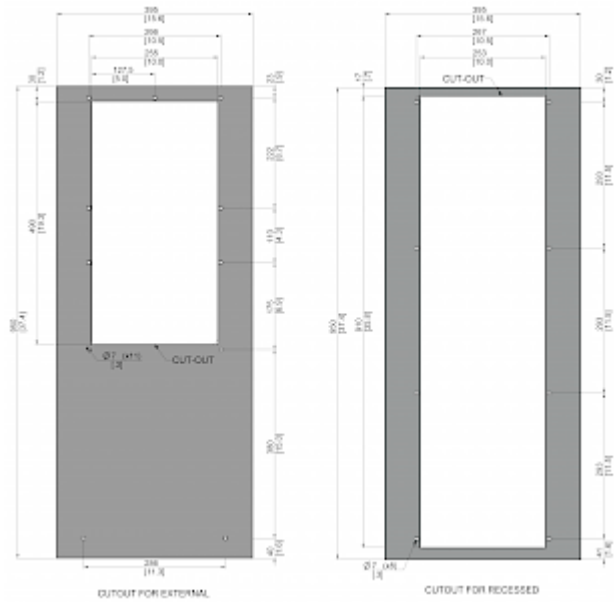

Order Information

Box dimensions 1042 x 495 x 283 mm

Gross weight 46 Kg

Taric code 84158200