

Enclosure air conditioner



Description

Order Number:	841220001
Brand Name:	SLIMLINE PRO
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	IP 55 / Type 12
Note:	Hat denselben Schaltschrankausbruch wie KG 8508 und KG 8512
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	5120 BTU @ 50 Hz 5630 BTU @ 60 Hz
Cooling capacity 95F/122F:	4440 BTU @ 50 Hz 4950 BTU @ 60 Hz
EER 95F95F:	2.1 / 1.8
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	247 g / 8.7 oz.
High / low pressure:	30 / 6 bar 435 / 88 psi
Air volume flow (system / unimpeded):	Ambient: 323 / 500 m ³ /h Enclosure: 206 / 500 m ³ /h
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	37.5 x 15.6 x 9.9 inch
Weight:	88 lbs
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current 95F95F:	1.6 A @ 50 Hz 1.6 A @ 60 Hz
Starting current:	8.2 A
Max. current:	1.9 A
Nominal power 95F95F:	710 W @ 50 Hz 910 W @ 60 Hz
Max. power:	940 W @ 50 Hz 1150 W @ 60 Hz
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	1.3 A

Full load current fans: 1.3 A

Connection: 4 - poliger Stecker für Versorgungsspannung
5 - poliger Stecker für Signale
3 - poliger Stecker für RS 485

Cut out Dimensions:

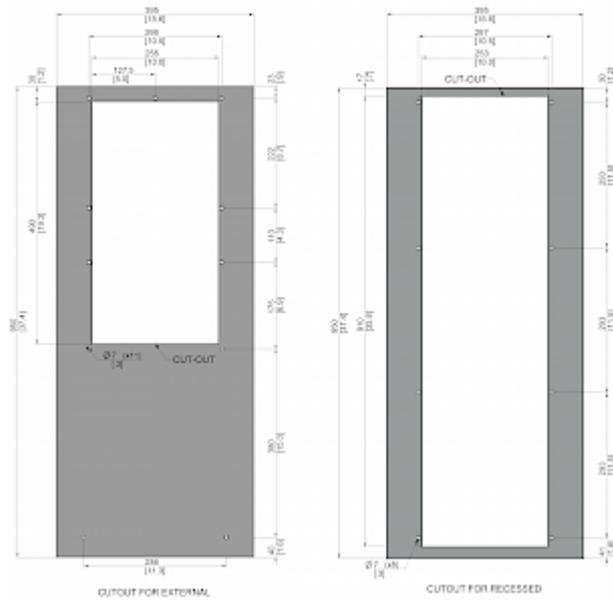

Order Information

Box dimensions	1042 x 495 x 283 mm
Gross weight	46 Kg
Taric code	84158200