

## Enclosure air conditioner



## Description


<b>Order Number:</b>	854020S62
<b>Brand Name:</b>	SLIMLINE PRO
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Note:</b>	pat. D815,265
<b>Approvals:</b>	CE, cURus, cULus

## Technical data


<b>Cooling capacity 95F/95F:</b>	13650 BTU @ 50 Hz 14300 BTU @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	11950 BTU @ 50 Hz 13300 BTU @ 60 Hz
<b>EER 95F95F:</b>	2.31
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	570 g / 20.1 oz.
<b>High / low pressure:</b>	32 / 6 bar 460 / 88 psi
<b>Operating temperature range:</b>	50°F - 140°F
<b>UL temperature range:</b>	50°F - 140°F
<b>Air volume flow (system / unimpeded):</b>	Ambient: 590 / 825 cfm Enclosure: 441 / 706 cfm
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimension H x W x D:</b>	1550 x 455 x 270 mm
<b>Weight:</b>	136 lbs.
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>UL Voltage / Frequency:</b>	460 V / 60Hz 3~
<b>Current 95F95F:</b>	3.5 A @ 50 Hz 3.7 A @ 60 Hz
<b>Starting current:</b>	15 A
<b>Max. current:</b>	4.8 A
<b>Nominal power 95F95F:</b>	1.73 kW @ 50 Hz 2.27 kW @ 60 Hz
<b>Max. power:</b>	3.2 kW
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA

<b>Rated current compressor:</b>	3 A
<b>Full load current fans:</b>	1.3 A
<b>Connection:</b>	4 pole terminal block for power 5 pole terminal block for signals 3 pole terminal block for RS 485

**Performance graph:**

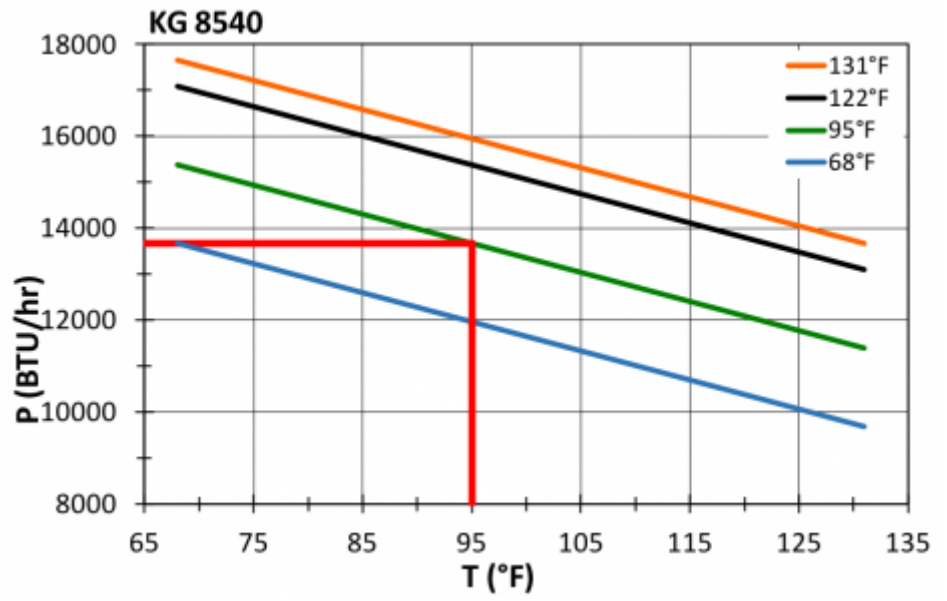

**Cut out dimensions:**

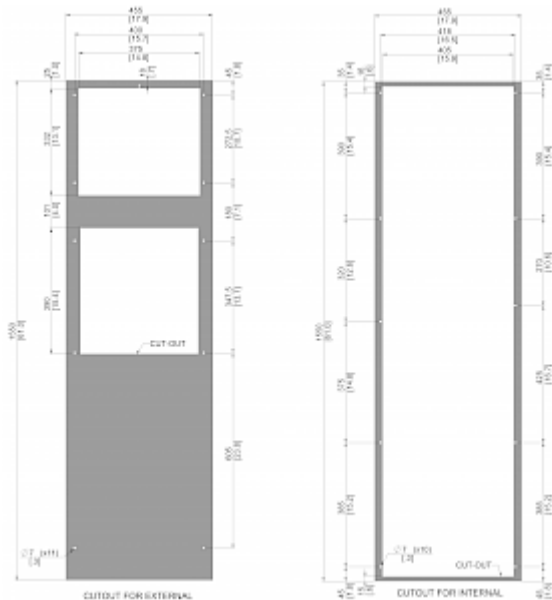

## Order Information

<b>Verpackungsmaße</b>	1642 x 555 x 299 mm
<b>Bruttogewicht</b>	72.5 Kg
<b>Zolltarifnummer</b>	84158200