

## Enclosure air conditioner



## Description

<b>Order Number:</b>	841220S62
<b>Brand Name:</b>	SLIMLINE PRO
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection to EN 60 529:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Note:</b>	Hat denselben Schaltschrankausbruch wie KG 8508 und KG 8512
<b>Approvals:</b>	CE, cURus, cULus

## Technical data

<b>Cooling capacity 95F/95F:</b>	5120 BTU @ 50 Hz 5630 BTU @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	4440 BTU @ 50 Hz 4950 BTU @ 60 Hz
<b>EER 95F95F:</b>	2.1 / 1.8
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	247 g / 8.7 oz.
<b>High / low pressure:</b>	30 / 6 bar 435 / 88 psi
<b>Air volume flow (system / unimpeded):</b>	Ambient: 323 / 500 m <sup>3</sup> /h Enclosure: 206 / 500 m <sup>3</sup> /h
<b>Operating temperature range:</b>	50°F - 140°F
<b>UL temperature range:</b>	50°F - 140°F
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimension H x W x D:</b>	37.5 x 15.6 x 9.9 inch
<b>Weight:</b>	88 lbs
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>UL Voltage / Frequency:</b>	460 V / 60Hz 3~
<b>Current 95F95F:</b>	1.6 A @ 50 Hz 1.6 A @ 60 Hz
<b>Starting current:</b>	8.2 A
<b>Max. current:</b>	1.9 A
<b>Nominal power 95F95F:</b>	710 W @ 50 Hz 910 W @ 60 Hz
<b>Max. power:</b>	940 W @ 50 Hz 1150 W @ 60 Hz
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	1.3 A


**Full load current fans:** 1.3 A

---

**Connection:** 4 - poliger Stecker für Versorgungsspannung  
5 - poliger Stecker für Signale  
3 - poliger Stecker für RS 485

---

**Cut out Dimensions:**

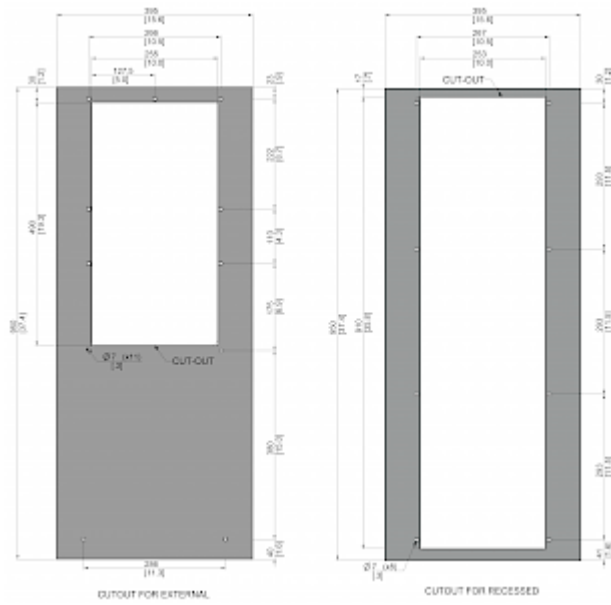

## Order Information

**Box dimensions** 1042 x 495 x 283 mm

**Gross weight** 46 Kg

**Taric code** 84158200