

Thermoelectric cooler




Description

Order Number:	3035305
Brand Name:	SoliTherm Peltier
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE


Technical data

Cooling capacity 95F/95F:	100 BTU
Air volume flow (system / unimpeded):	Umgebungskreislauf: 39 / 75 m ³ /h Schrankkreislauf: 20 / 62 m ³ /h
Operating temperature range:	-4°F - 158°F
UL temperature range:	-4°F - 149°F
Mounting:	Wall mounted (with frame)
Dimension H x W x D:	8.3 x 6.2 x 5.2 inch
Weight:	5.7 lbs.
Cut out dimensions:	7.1 x 5.0 inch
Voltage / Frequency:	24 V DC
Current 95F95F:	2 A
Starting current:	4 A
Max. current:	2.2 A
Nominal power 95F95F:	44 W
Max. power:	52 W
Fuse:	5 A (T)
Connection:	Connection terminal block


Performance graph:

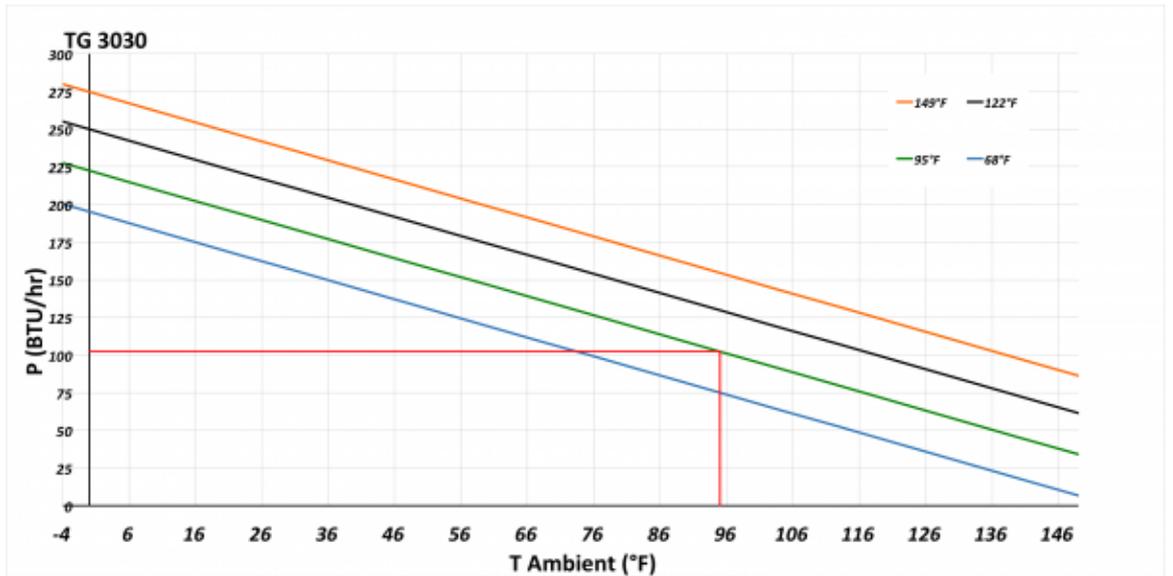

Air flow:

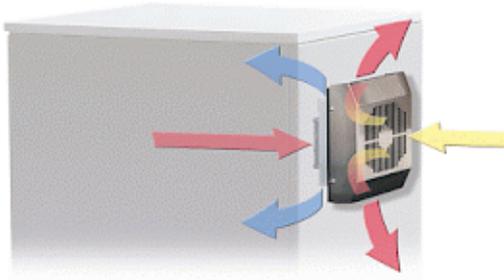

Cut out Dimensions:

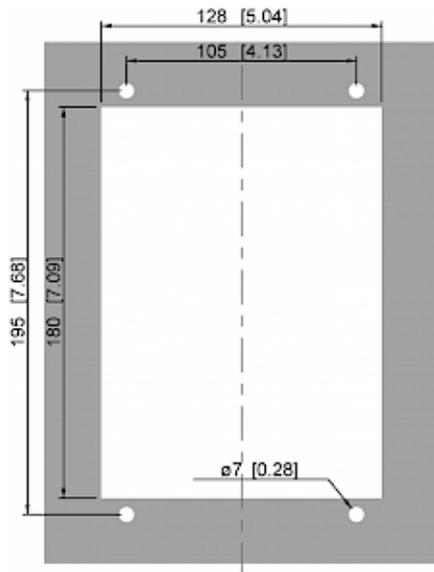

Order Information

Stainless steel AISI 316 (V4A) housing part no.	30353054
Verpackungsmaße	244 x 187 x 174 mm
Bruttogewicht	2.5 kg
Taric code	84158300