

Enclosure air conditioner




Description

Order Number:	850510S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	2215 BTU
Cooling capacity 95F/122F:	1350 BTU
EER 95F95F:	1.4
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	107 g / 3.8 oz
High / low pressure:	28 / 6 bar 406 / 88 psi
Air volume flow (system / unimpeded):	Ambient air circuit: 117 / 240 cfm Enclosure circuit: 72 / 106 cfm
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 131°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	14.6 x 20.5 x 6.2 inch
Weight:	35 lbs
Voltage / Frequency:	120 V ~ 60 Hz
UL Voltage / Frequency:	120 V ~ 60 Hz
Current 95F95F:	4.2 A
Starting current:	15.5 A
Max. current:	5.2 A
Nominal power 95F95F:	470 W
Max. power:	600 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	3.7 A
Full load current fans:	0.4 A
Connection:	4 pole terminal block for electrical connection 5 pole terminal block for signals 3 pole terminal block for RS 485

Performance graph:

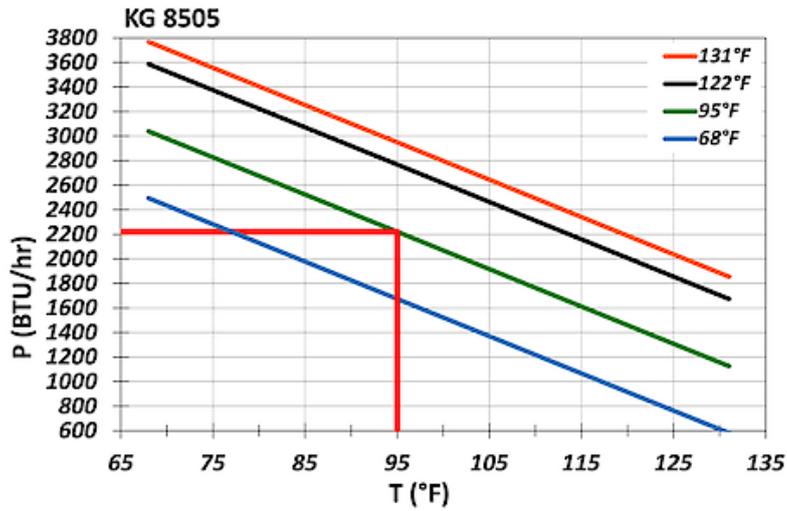

Cut out Dimensions:

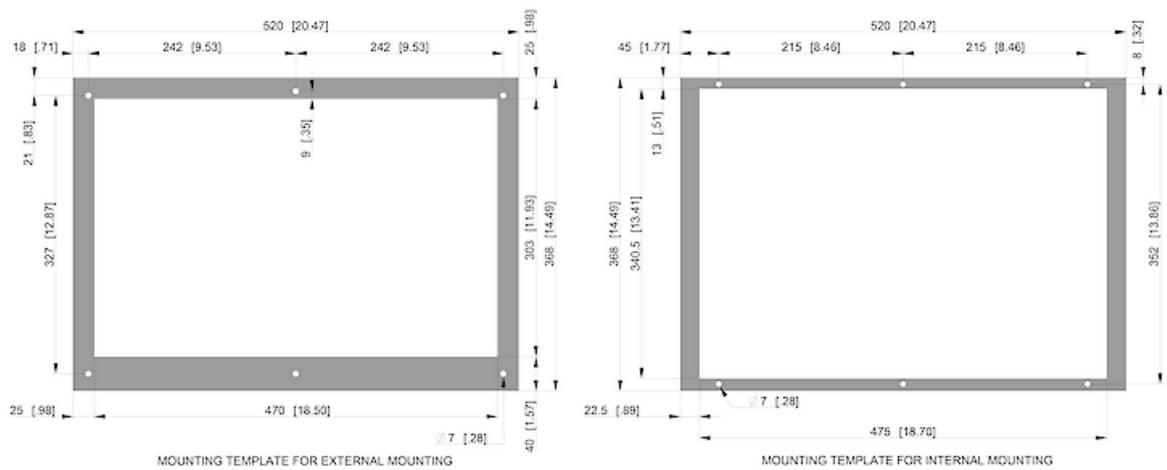

Order Information

Box dimensions 460 x 620 x 181.75 mm

Gross weight 20 Kg

Taric code 84158200