

Enclosure air conditioner



Description

Order Number:	850620S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	2385 BTU/hr @ 50 Hz 2560 BTU/hr @ 60 Hz
Cooling capacity 95F/122F:	2115 BTU/hr @ 50 Hz 2235 BTU/hr @ 60 Hz
EER 95F95F:	1.6 / 1.7
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	127 g / 4.5 oz
High / low pressure:	28 / 6 bar 406 / 88 psi
Air volume flow (system / unimpeded):	Ambient air circuit: 135 / 240 cfm Cabinet air circuit: 72 / 106 cfm
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 131°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	23.7 x 9.9 x 7.3 inch
Weight:	33 lbs
Voltage / Frequency:	400V/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	460 V / 60Hz 2~
Current 95F95F:	1.2 A @ 50Hz 1.2 A @ 60 Hz
Starting current:	3.1 A
Max. current:	1.6 A
Nominal power 95F95F:	440 W @ 50 Hz 440 W @ 60 Hz
Max. power:	620 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	0.92 A
Full load current fans:	0.12 A


Connection:

4 pole terminal block for power

5 pole terminal block for signals

3 pole terminal block for RS 485

Cut out Dimensions:

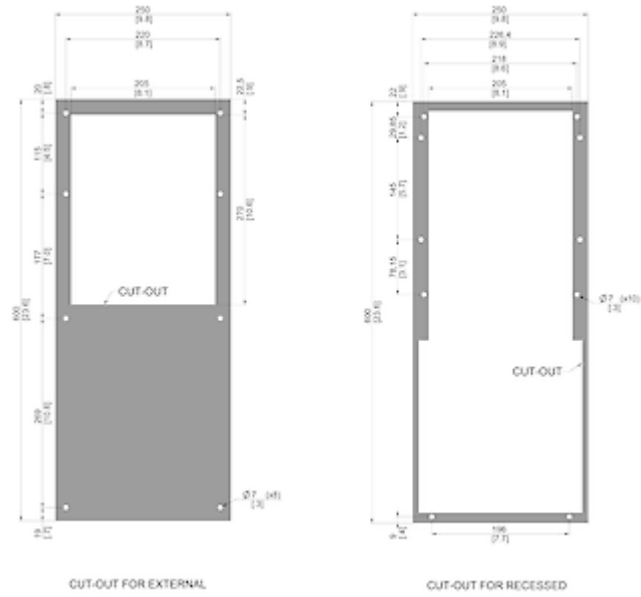

Order Information

Box dimensions	692 x 350 x 242 mm
Gross weight	17 Kg
Taric code	84158200