

Enclosure air conditioner



Description

Order Number:	85159576
Brand Name:	SLIMLINE PRO
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	Type 3, 3R, 12, 4
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	5120 BTU @ 50 Hz 5120 BTU @ 60 Hz
Cooling capacity 95F/122F:	4435 BTU @ 50 Hz 4435 BTU @ 60 Hz
EER 95F95F:	2.0
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	315 g / 11.1 oz
High / low pressure:	30 / 6 bar 435 / 88 psi
Air volume flow (system / unimpeded):	Ambient air circuit: 323 / 500 cfm Cabinet air circuit: 294 / 500 cfm
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	1550 x 455x 292 mm
Weight:	96.6 lbs
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current 95F95F:	1.7 A @ 50 Hz 1.7 A @ 60 Hz
Starting current:	8.2 A
Max. current:	1.9 A
Nominal power 95F95F:	750 W @ 50 Hz 930 W @ 60 Hz
Max. power:	1190 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	1.3 A


Full load current fans:

1.3 A


Connection:

4 pole terminal block for power
5 pole terminal block for signals
3 pole terminal block for RS 485

Performance graph:

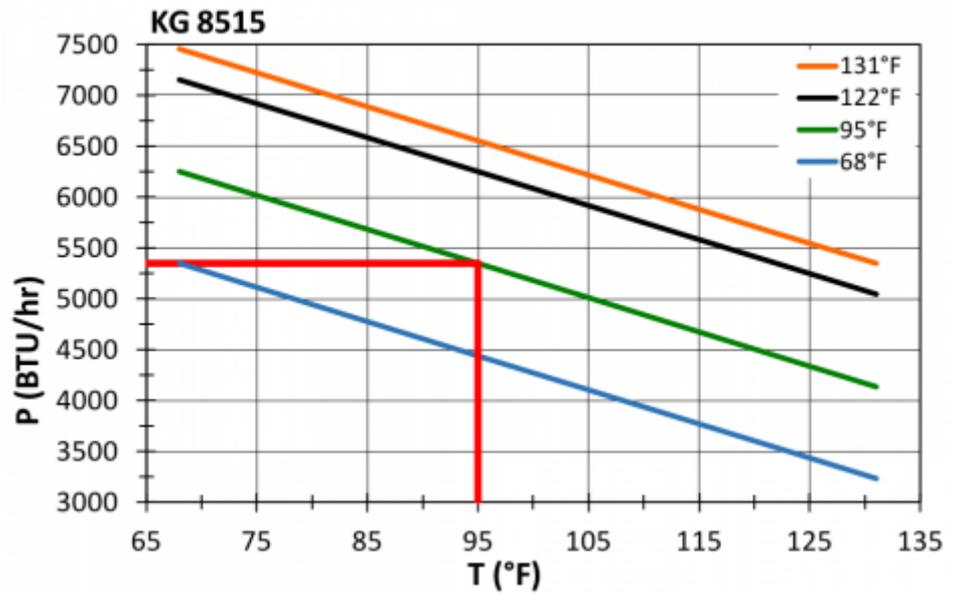

Cut out Dimensions:

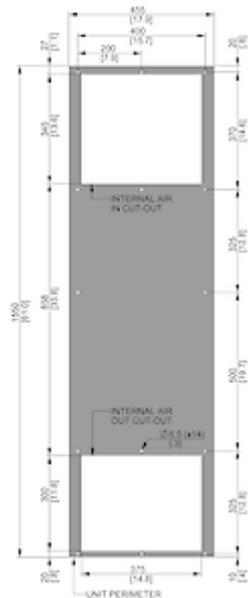

Order Information

Verpackungsmaße	1442 x 495 x 242 mm
Bruttogewicht	49 Kg
Zolltarifnummer	84158200