


Filterless enclosure cooling unit



Description


Order Number:	4269102
Brand Name:	SLIMLINE
Housing Material:	Stainless steel AISI 304 (V2A)
IP protection class to EN 60 529:	IP 54 / TYPE 12
Approvals:	CE, cURus, cULus
Accessories:	 NEMA 4X Cover 4269

Technical Data

Cooling capacity L35L35 (EN14511-3):	520 W
Cooling capacity L35L50 (EN14511-3):	180 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	187 g / 6.6 oz
High / low Pressure:	17 / 15 bar 250 / 220 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 250 / 650 m ³ /h Cabinet air circuit: 125 / 250 m ³ /h
Operating Temperature Range:	10°C - 50°C
Mounting:	Wall mounted / Recessed
Dimensions A x B x C (D+E):	600 x 320 x 110 (25+85) mm
Weight:	15.8 kg
Cut out dimensions:	581 x 301 mm
Voltage / Frequency:	120 V ~ 60 Hz
Current L35L35:	4.8 A
Starting current:	14.6 A
Max. current:	5.6 A
Nominal power L35L35:	540 W
Max. power:	600 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Rated current compressor:	15.2 A
Full load current fans:	5.3 A
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group SLIMLINE - filterless cooling units](#)

Performance graph:

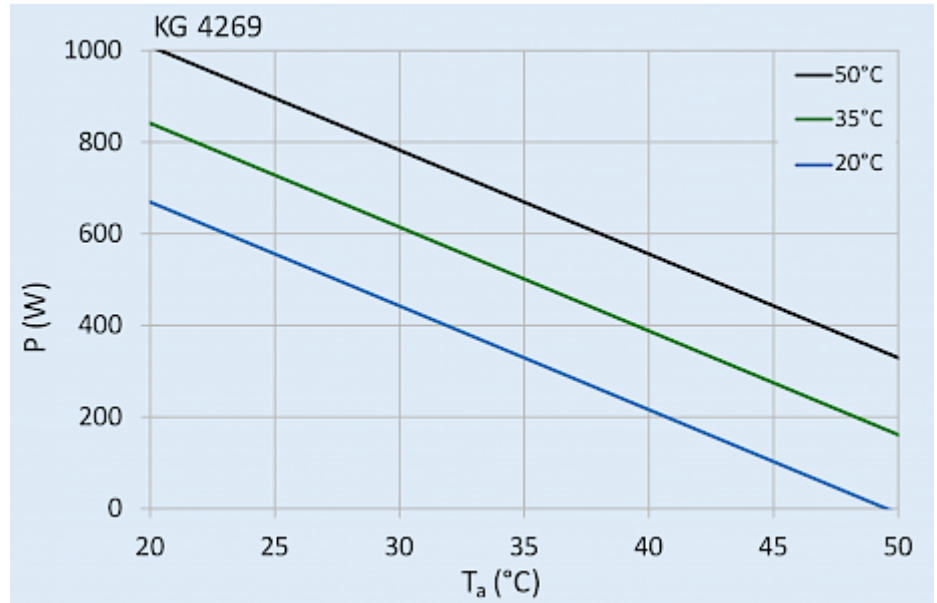


click image to enlarge

Air flow:

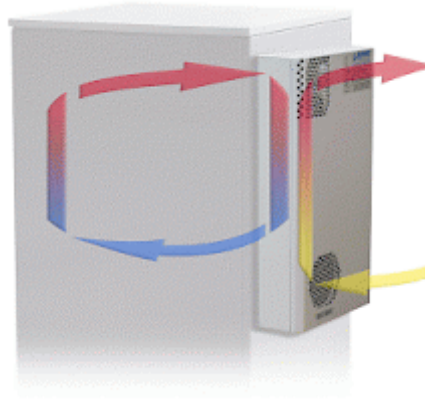

click image to enlarge

Cut out Dimensions:

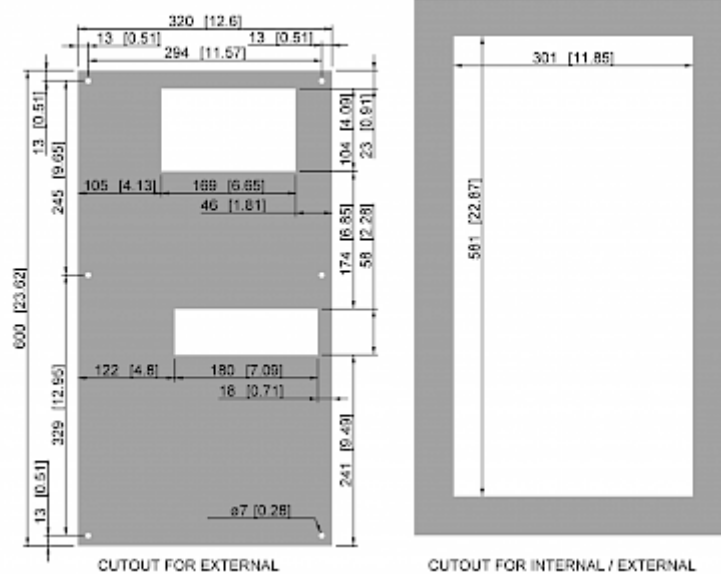

click image to enlarge

Order Information

Box dimensions	680 x 400 x 155 mm
Gross weight	19 kg
Tarcic code	84158200
GTIN (EAN)	5350604370685