

## Dachaufsatz Kühlgerät




## Description

<b>Order Number:</b>	951200001
<b>Brand Name:</b>	SLIMLINE PRO TOP
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	NEMA 12
<b>Approvals:</b>	CE

## Technical data

<b>Cooling capacity 95F/95F:</b>	1250 W
<b>Cooling capacity 95F/122F:</b>	800 W
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	160 g / 5.64 oz.
<b>High / low pressure:</b>	32 / 6 bar 464 / 87 psig
<b>Operating temperature range:</b>	5°C - 55°C
<b>Air volume flow (system / unimpeded):</b>	Umgebungskreislauf: 850 m <sup>3</sup> /h Schrankkreislauf: 483 / 850 m <sup>3</sup> /h
<b>Mounting:</b>	Roof mounted
<b>Dimension H x W x D:</b>	412 x 595 x 395 mm
<b>Weight:</b>	37.25 kg
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	3.2 A
<b>Starting current:</b>	16 A
<b>Max. current:</b>	4.5 A
<b>Nominal power 95F95F:</b>	680 W
<b>Fuse:</b>	15 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	4 - poliger Stecker für Stromversorgung 5 - poliger Stecker für Signale 3 - poliger Stecker für RS 485 MODBUS

**Cut out dimensions:**

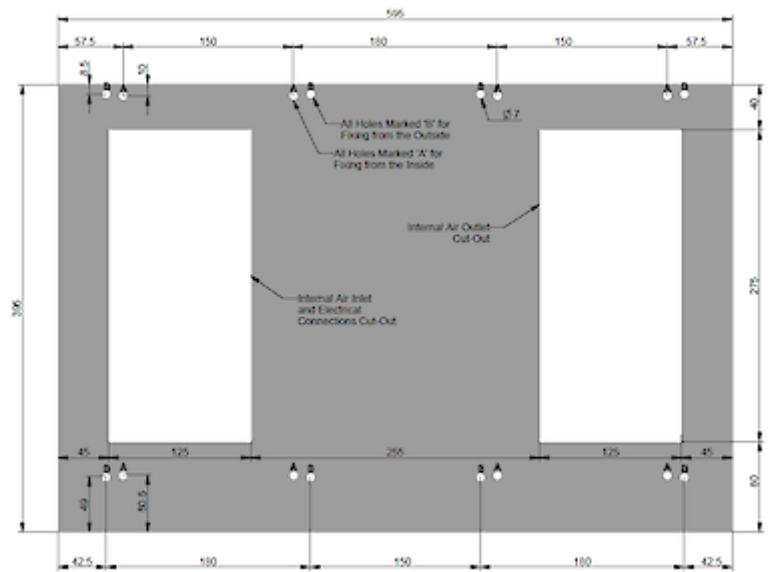

## Order Information

**Mit Edelstahlgehäuse Bestell Nr.** 95120002

**Zolltarifnummer** 84158200