

## Roof Fan



## Description

<b>Order Number:</b>	6085A4000
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>IP protection class to EN 60 529:</b>	IP 54, Type 1, 12
<b>Approvals:</b>	CE, cURus

## Technical Data


<b>Air flow unimpeded IP 54:</b>	630 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	-10°C - 55°C
<b>Static pressure:</b>	360 Pa
<b>Mounting:</b>	top mounted
<b>Dimensions A x B x C (D+E):</b>	147 x 457 x 457 mm
<b>Weight:</b>	6.4 kg
<b>Cut out dimensions:</b>	291 x 291 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.38 / 0.49 A
<b>Power consumption:</b>	88 / 116 W
<b>Degree of separation IP 54:</b>	85% - DIN 24185
<b>Filter class (ISO 16890):</b>	G3 (Aluminium optional)
<b>Noise level:</b>	70 dB(A)
<b>Connection:</b>	4 pole connector

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

**Performance graph:**

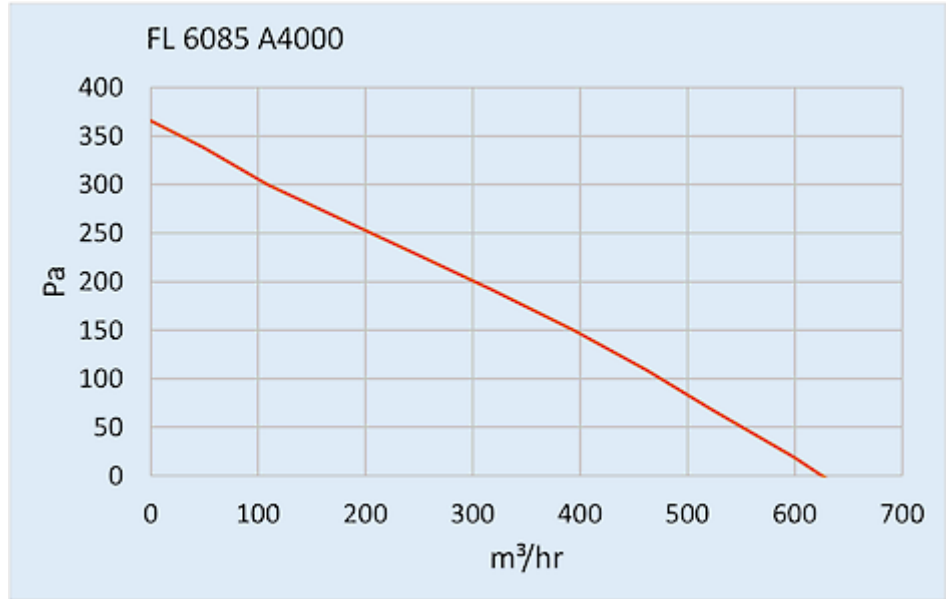

click image to enlarge

**Cut Out Dimension:**

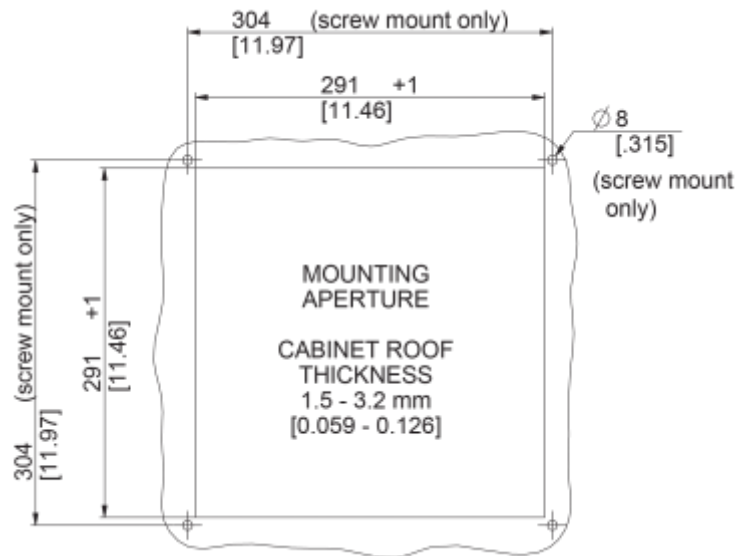

click image to enlarge

## Order Information

<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100893