

## SLIMLINE HEX air / water heat exchanger



### Description

<b>Order Number:</b>	761205B101
<b>Brand Name:</b>	SLIMLINE HEX
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>IP protection class to EN 60 529:</b>	IP 55
<b>Approvals:</b>	CE

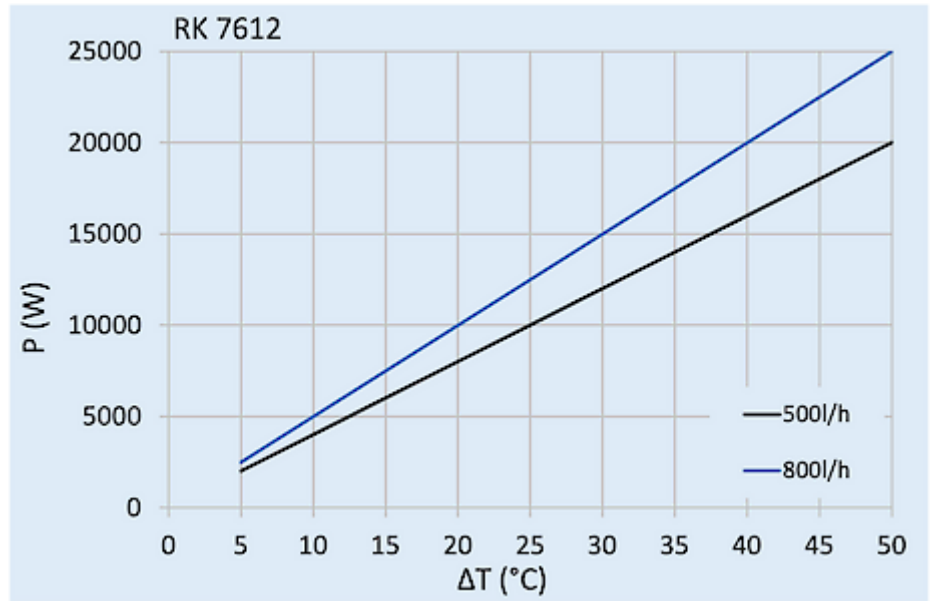
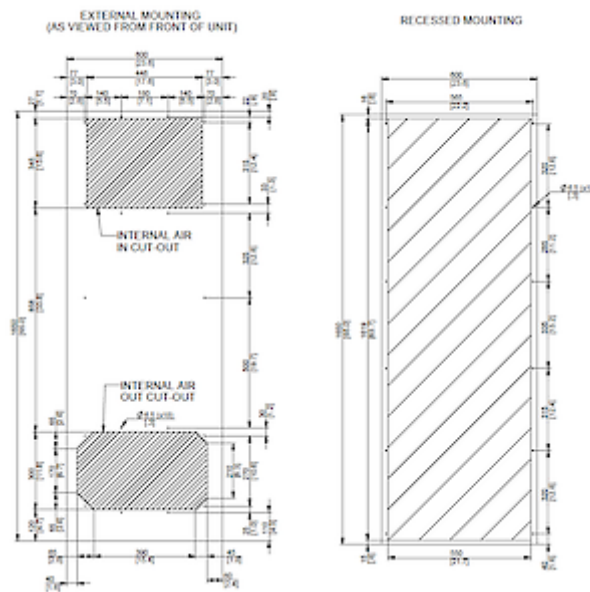
## Technical Data

<b>Cooling capacity L35W10 (200 l/h):</b>	12500 W (800 l/h)
<b>Coolant:</b>	Water, light oils or similar
<b>Air flow volume (system / unimpeded):</b>	2400 / 3760 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	1°C - 60°C
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimensions A x B x C (D+E):</b>	1,650 x 600 x 378 (35 + 343) mm
<b>Weight:</b>	70 kg
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Starting current:</b>	2.9 / 2.2 A
<b>Max. current:</b>	1.3 / 1.8 A
<b>Max. power:</b>	290 / 410 W
<b>Pressure water circuit:</b>	10 bar
<b>Water connection:</b>	Rp 1/2" - inside thread
<b>Fuse:</b>	2 A (T)
<b>Connection:</b>	5 - pole terminal for signals 4 - pole terminal for power

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE HEX - air/water heat exchangers](#)

**Performance graph:**

[click image to enlarge](#)
**Cut Out Dimension:**

[click image to enlarge](#)