

## Outdoor Radar Dome Air Conditioner



### Description

<b>Order Number:</b>	4410918
<b>Brand Name:</b>	Compact Outdoor
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>IP protection class to EN 60 529:</b>	IP 56
<b>Note:</b>	The unit has an internal MCB (miniature circuit breaker) accessible by removing the front cover
<b>Approvals:</b>	CE

## Technical Data


<b>Cooling capacity L35L35 (EN14511-3):</b>	1600 W (L40L45)
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	750 g / 26.5 oz
<b>High / low Pressure:</b>	21 / 6 bar 305 / 88 psig
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 530 / 1200 m <sup>3</sup> /h Cabinet air circuit: 375 / 550 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	+20°C - +50°C
<b>Mounting:</b>	Standalone
<b>Dimensions A x B x C (D+E):</b>	550 x 557 x 500 mm
<b>Weight:</b>	50 kg
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current L35L35:</b>	4.2 A
<b>Starting current:</b>	15.5 A
<b>Max. current:</b>	4.7 A
<b>Nominal power L35L35:</b>	1.02 kW
<b>Fuse:</b>	10 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	2 x 3 m 180 mm flexible plastic duct

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

**Performance graph:**

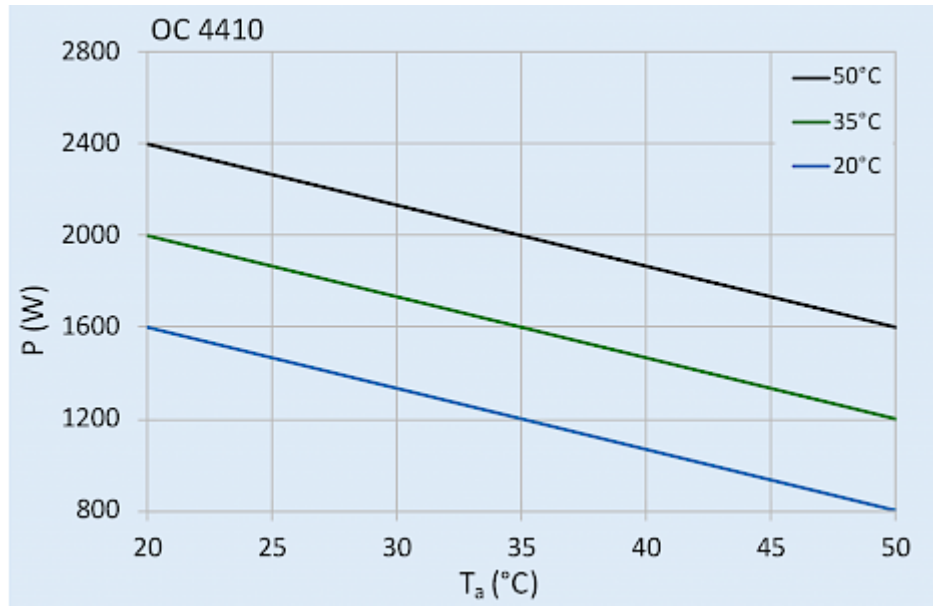

[click image to enlarge](#)

**Cut out Dimensions:**

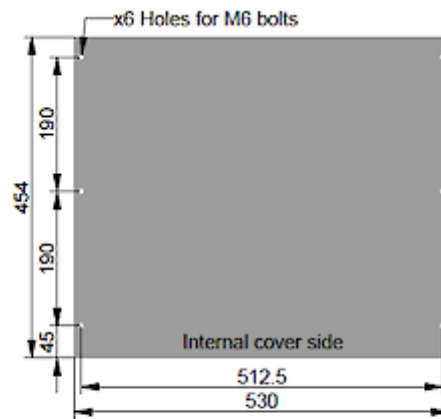

[click image to enlarge](#)

## Order Information

<b>Taric code</b>	84158200
<b>GTIN (EAN)</b>	5350604321816