

Cooling unit NEMA / type 4X



Description

Order Number:	57080182
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	With enclosure heater and aluminium filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

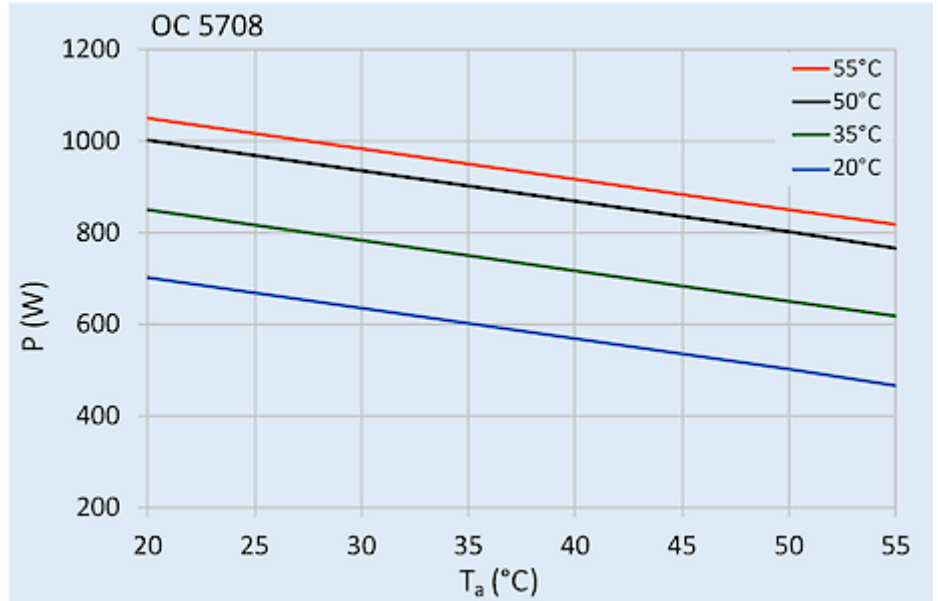
Technical Data

Cooling capacity L35L35 (EN14511-3):	750 W @ 50 Hz 830 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	650 W @ 50 Hz 695 W @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	234 g / 8.3 oz
High / low Pressure:	31.5 / 6.1 bar 457 / 88 psig
Operating Temperature Range:	-40°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 315 / 850 m ³ /h Cabinet air circuit: 165 / 250 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	830 x 304 x 270 mm
Weight:	30 kg
Cut out dimensions:	265 x 180 265 x 160 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current L35L35:	2.7 A @ 50 Hz 2.8 A @ 60 Hz
Starting current:	10 A
Max. current:	3.3 A
Nominal power L35L35:	495 W @ 50 Hz 545 W @ 60 hz
Max. power:	671 W
Fuse:	5 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

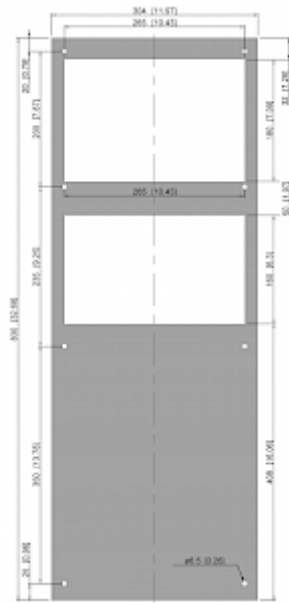
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

Performance graph:


[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

In stainless steel 316 (V4A) part no.	57080184
Box dimensions	870 x 348 x 310 mm
Gross weight	32 kg
Taric code	84158200