

Cooling unit NEMA / type 4X



Description

| | |
|----------------------------|--|
| Order Number: | 57100182 |
| Brand Name: | Compact Outdoor |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress Protection: | IP 56 / Type 12, 3, 3R, 4, 4X |
| Included: | With enclosure heater and aluminium filter |
| Approvals: | CE, cURus, cULus |
| UL File Number: | cURus (SA32278), cULus (E498756) |

Technical Data


| | |
|--|--|
| Cooling capacity L35L35 (EN14511-3): | 1000 W @ 50 Hz 1080 W @ 60 Hz |
| Cooling capacity L35L50 (EN14511-3): | 660 W @ 50 Hz 720 W @ 60 Hz |
| Enclosure heater: | 400 W |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R513A / 630 |
| Refrigerant charge: | 291 g / 10.3 oz |
| High / low Pressure: | 30.1 / 6 bar 445 / 88 psig |
| Operating Temperature Range: | -40°C - 55°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 320 / 850 m ³ /h Cabinet air circuit: 375 / 550 m ³ /h |
| Mounting: | Wall mounted |
| Dimensions A x B x C (D+E): | 900 x 304 x 270 mm |
| Weight: | 38 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current L35L35: | 2.7 A @ 50 Hz 2.7 A @ 60 Hz |
| Starting current: | 16 A |
| Max. current: | 4.6 A |
| Nominal power L35L35: | 571 W @ 50 Hz 611 W @ 60 Hz |
| Max. power: | 667 W @ 50Hz 734 W @ 60Hz |
| Fuse: | 9 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | 4-pole terminal block for power 5-pole terminal block for signals 3-pole terminal block for RS 485 |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

Performance graph:

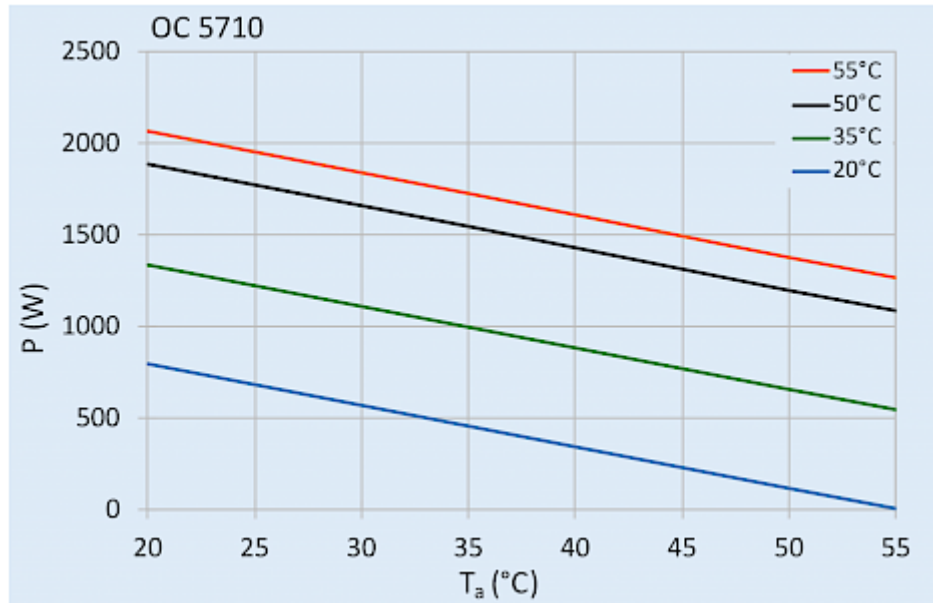

click image to enlarge

Cut Out Dimension:



click image to enlarge

Order Information

| | |
|--|--------------------|
| In stainless steel 316 (V4A) part no. | 57100184 |
| Box dimensions | 940 x 348 x 310 mm |
| Gross weight | 40 kg |
| Taric code | 84158200 |