

Cooling unit NEMA / type 4X



Description

Order Number:	57101182
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
IP protection class to EN 60 529:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	With enclosure heater and aluminium filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical Data

Cooling capacity L35L35 (EN14511-3):	1000 W @ 50 Hz 1080 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	660 W @ 50 Hz 720 W @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	291 g / 10.3 oz
High / low Pressure:	30.1 / 6 bar 445 / 88 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 320 / 850 m ³ /h Cabinet air circuit: 375 / 550 m ³ /h
Operating Temperature Range:	-40°C - 55°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	900 x 304 x 270 mm
Weight:	40 kg
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current L35L35:	5.2 A @ 50 Hz 5.2 A @ 60 Hz
Starting current:	10.6 A
Max. current:	9.1 A
Nominal power L35L35:	571 W @ 50 Hz 611 W @ 60 Hz
Max. power:	667 W @ 50 Hz 734 W @ 60 Hz
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	3.2 A
Full load current fans:	1.5 A

Connection:


4-pole terminal block for power
5-pole terminal block for signals
3-pole terminal block for RS 485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

Performance graph:

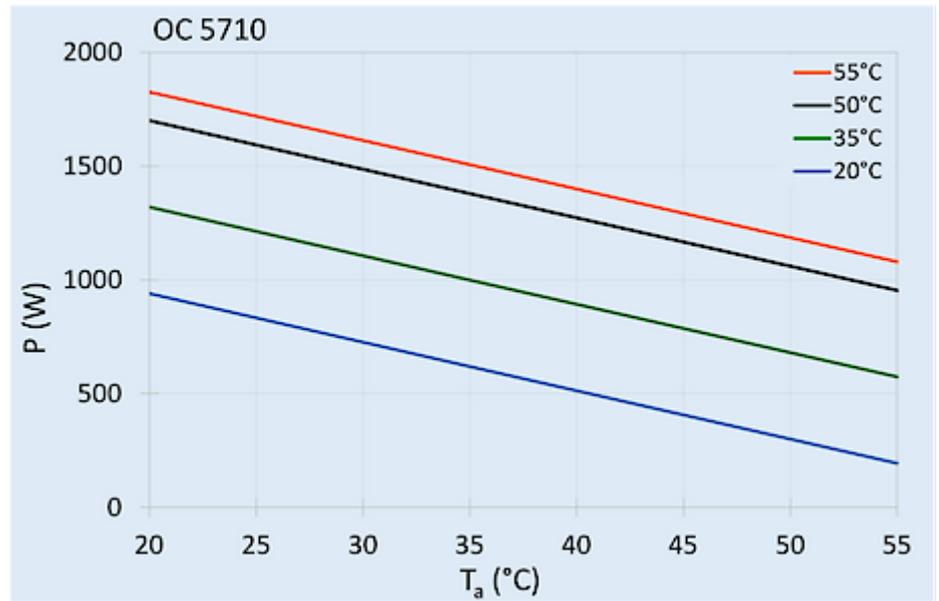

[click image to enlarge](#)

Cut out Dimensions:



[click image to enlarge](#)

Order Information

In stainless steel 316 (V4A) part no.	57101184
Box dimensions	940 x 348 x 310 mm
Gross weight	42 kg
Taric code	84158200