




## Cabinet cooling unit



## Description

<b>Order Number:</b>	850810001
<b>Brand Name:</b>	SLIMLINE PRO
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress Protection:</b>	IP 55 / Type 12
<b>Approvals:</b>	CE, CURus, cULus
<b>Accessories:</b>	<div style="display: flex; align-items: center; margin-bottom: 10px;">  <span>Gasket Kit Type 4</span> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <span>Cold Air Outlet Duct 8508/12/8412</span> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <span>Washable Aluminium Filter 8508/12/8412</span> </div> <div style="display: flex; align-items: center;">  <span>Vibration Protection Kit 1</span> </div>

## Technical Data

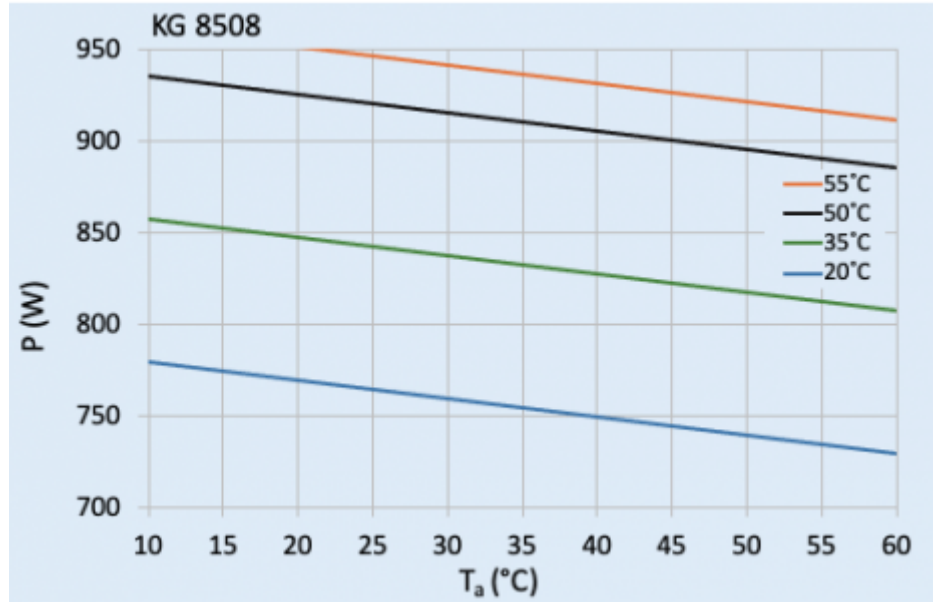
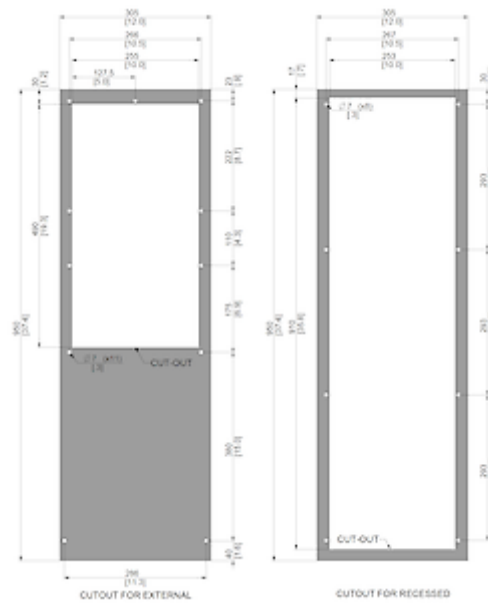
<b>Cooling capacity L35L35 (EN14511-3):</b>	825 W @ 50 Hz 870 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	820 W @ 50 Hz 835 W @ 60 Hz
<b>EER L35L35:</b>	1.80
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	175 g / 6.2 oz
<b>High / low Pressure:</b>	30 / 6 bar 435 / 88 psi
<b>Operating Temperature Range:</b>	10°C - 60°C
<b>UL temperature range:</b>	10°C - 55°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 370 / 650 m <sup>3</sup> /h Cabinet air circuit: 350 / 550 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimensions A x B x C (D+E):</b>	950 x 305 x 210 (55+155) mm
<b>Weight:</b>	30 kg
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	120 V ~ 60 Hz
<b>Current L35L35:</b>	4.2 A @ 50 Hz 4.6 A @ 60 Hz
<b>Starting current:</b>	28 A
<b>Max. current:</b>	6.8 A
<b>Nominal power L35L35:</b>	460 W @ 50 Hz 520 W @ 60 Hz
<b>Max. power:</b>	690 W
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	3.2 A

<b>Full load current fans:</b>	2.5 A
<b>Connection:</b>	4 pole terminal block for power 5 pole terminal block for signals 3 pole terminal block for RS 485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE PRO - cooling units in a new design](#)

**Performance graph:**

[click image to enlarge](#)
**Cut Out Dimension:**

[click image to enlarge](#)

## Order Information

**Box dimensions** 1042 x 405 x 242 mm

**Taric code** 31 Kg

**Taric code** 84158200