

Filter fan SF 4725 - 120V



Description

Order Number:	4725182201
Brand Name:	SOLIVENT PRO
Colour:	RAL 7035
Housing Material:	PC plastic
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 300](#)



[Hose-proof protection hood FC 4000 300 FDA](#)



[Thermostat 301050](#)

Technical Data


Air flow unimpeded IP 54:	235 / 264 m ³ /hr
Air flow with exhaust filter IP 54:	167 / 200 m ³ /hr
Operating Temperature Range:	-10°C - 60°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	255.4 x 255.5 x 112.5 (11.6+100.9) mm
Weight:	1.8 kg
Cut out dimensions:	224 x 224 mm
Voltage / Frequency:	120 V ~ 50/60 Hz
Rated current:	0.56 / 0.47 A
Power consumption:	41 / 38 W
Degree of separation IP 54:	67 % - DIN 24185
Degree of separation IP 55:	85 % - DIN 24185
Wall thickness:	1-3 mm
Noise level:	52 dB (A)
Fuse:	1 A (T)
Connection:	Spring terminal

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:

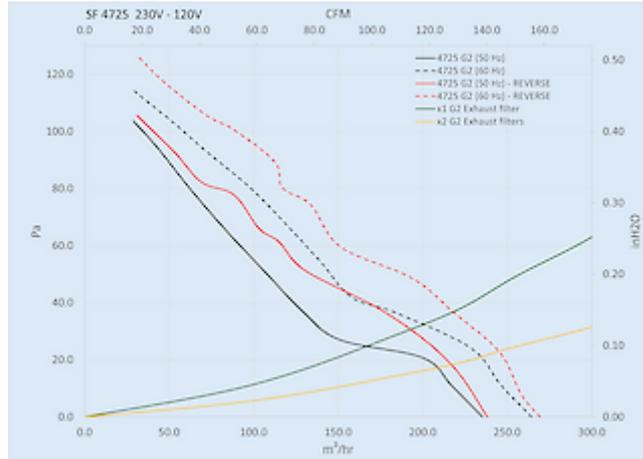


click image to enlarge

Cooling capacity:

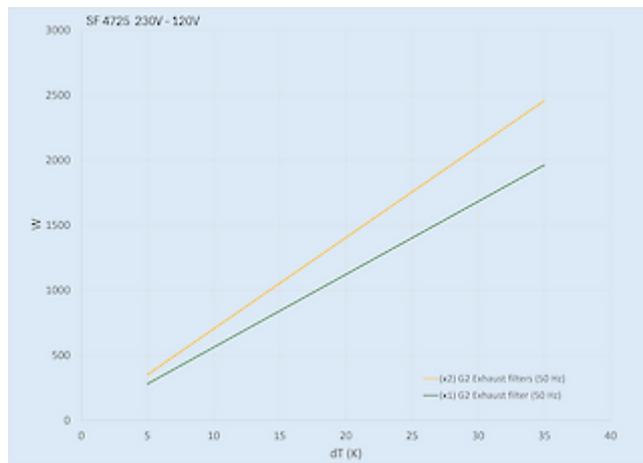

click image to enlarge

Cut out Dimensions:

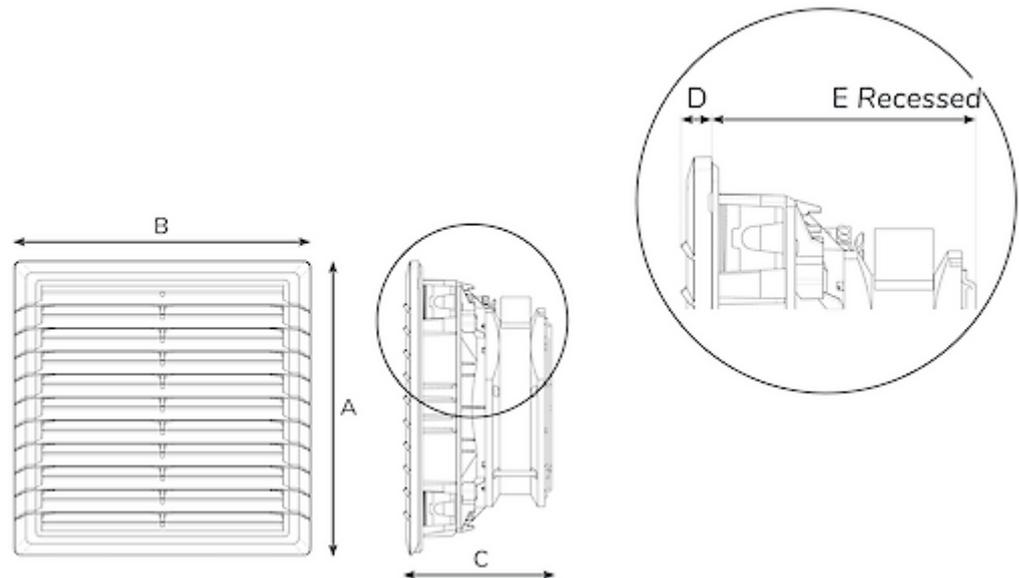

click image to enlarge

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4725182201	54	12 / 3R	RAL 7035	B	235 / 264 m ³ /hr	167 / 200 m ³ /hr
4725182203	54	12 / 3R	RAL 9005	B	235 / 264 m ³ /hr	167 / 200 m ³ /hr
4725183201	55	12 / 3R	RAL 7035	B	222 / 249 m ³ /hr	138 / 170 m ³ /h
4725183203	55	12 / 3R	RAL 9005	B	222 / 249 m ³ /hr	138 / 170 m ³ /hr
472518R2201	54	12 / 3R	RAL 7035	S	238 / 269 m ³ /hr	N/A
472518R2203	54	12 / 3R	RAL 9005	S	238 / 269 m ³ /hr	N/A
472518R3201	55	12 / 3R	RAL 7035	S	220 / 252 m ³ /hr	N/A
472518R3203	55	12 / 3R	RAL 9005	S	220 / 252 m ³ /hr	N/A

¹⁾ B = Blowing - from ambient into the enclosure (standard version)

S = Suction - from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz

Taric ode 84145915