

Filter Fan



Description

| | |
|--|------------------|
| Order Number: | 4883A3103 |
| Brand Name: | SOLIFLEX |
| Colour: | RAL 9005 |
| Housing Material: | ABS Plastic |
| IP protection class to EN 60 529: | IP 54, Type 12 |
| Note: | Reverse air flow |
| Approvals: | CE, cURus, cULus |
| UL File Number: | E498756 |

Accessories:



Technical Data

| | |
|-------------------------------------|---|
| Air flow unimpeded IP 54: | 930 m ³ /h |
| Operating Temperature Range: | -10°C - +55°C |
| Dimensions A x B x C (D+E): | 325 x 325 x 158.5 mm |
| Weight: | 4.25 kg |
| Cut out dimensions: | 291 x 291 (+1.5) mm |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Rated current: | 1.5 A |
| Power consumption: | 172 W |
| Degree of separation IP 54: | 85% - DIN 24185 |
| Wall thickness: | 1.5 - 2.5 mm |
| Filter class (ISO 16890): | G3 according to EN 779 |
| Installation: | Elastic clips or by 4 self-threading screws |
| Noise level: | 72 dB(A) |


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [cfm]
P = Static pressure [inH2O]

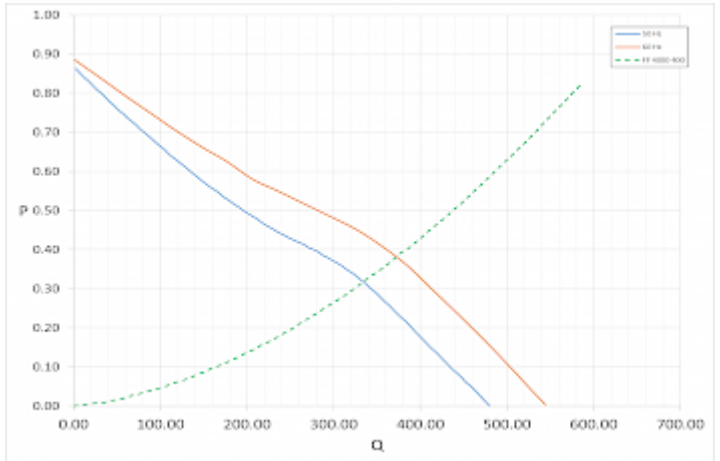

[click image to enlarge](#)

Cut Out Dimension:

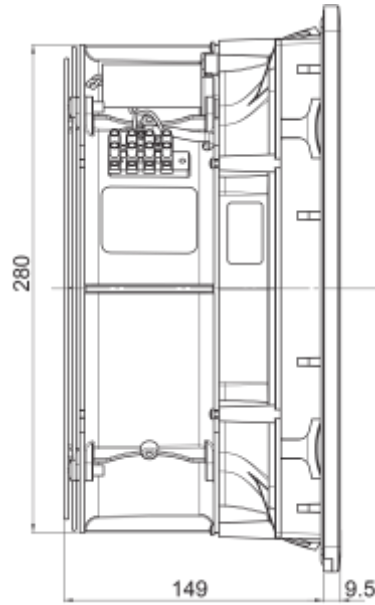

[click image to enlarge](#)

Order Information

| | |
|-------------------|---------------|
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100763 |