

Outdoor Radar Dome Air Conditioner




Description

Order Number:	4410886
Brand Name:	Compact Outdoor
Color:	RAL 7035
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56
Note:	The unit has an internal MCB (miniature circuit breaker) accessible by removing the front cover
Approvals:	CE

Technical data

Cooling capacity 95F/95F:	5460 BTU (104F/113F)
Cooling capacity 95F/122F:	5460 BTU (104F/113F)
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	750 g / 26.5 oz
High / low pressure:	21 / 6 bar 305 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 312 / 706 cfm Cabinet air circuit: 220 / 324 cfm
Operating temperature range:	+68°F - +122°F
Mounting:	Standalone
Dimension H x W x D:	21.6 x 21.9 x 19.7 inch
Weight:	110 lbs.
Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	37 A
Max. current:	9 A
Max. power:	1,100 W
Fuse:	16 A (T)
Short-circuit current rating:	5 kA
Connection:	2 x 3 m 180 mm flexible plastic duct

Performance graph:

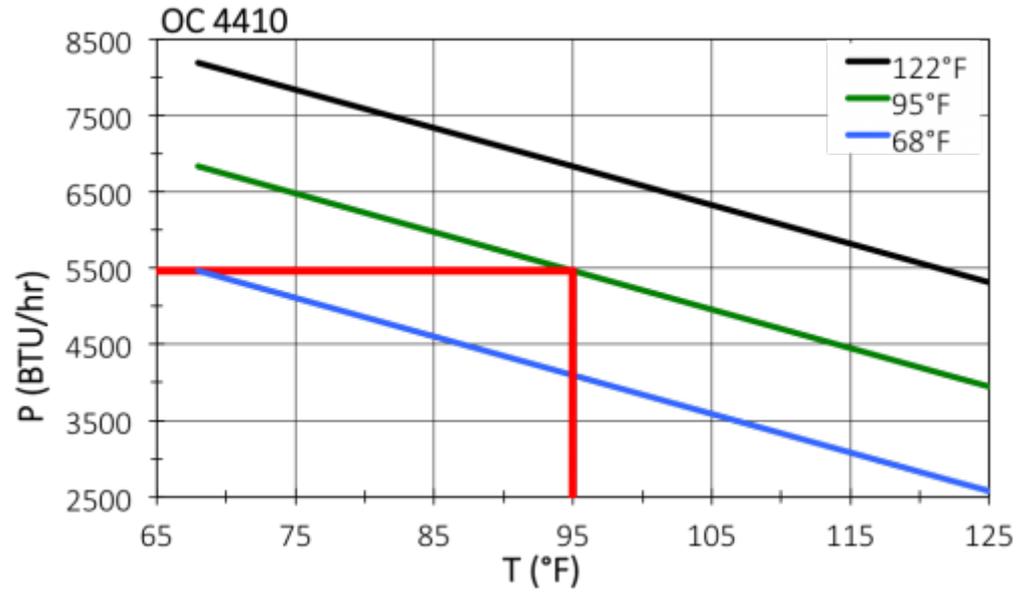

Cut out Dimensions:

