

Outdoor Radar Dome Air Conditioner




Description

Order Number:	4410918
Brand Name:	Compact Outdoor
Color:	RAL 7035
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56
Note:	The unit has an internal MCB (miniature circuit breaker) accessible by removing the front cover
Approvals:	CE


Technical data

Cooling capacity 95F/95F:	5460 BTU (104F/113F)
Cooling capacity 95F/122F:	5460 BTU (104F/113F)
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	750 g / 26.5 oz
High / low pressure:	21 / 6 bar 305 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 312 / 706 cfm Cabinet air circuit: 220 / 324 cfm
Operating temperature range:	+68°F - +122°F
Mounting:	Standalone
Dimension H x W x D:	21.6 x 21.9 x 19.7 inch
Weight:	110 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	4.2 A
Starting current:	15.5 A
Max. current:	4.7 A
Nominal power 95F95F:	1.02 kW
Max. power:	1.02 kW
Fuse:	10 A (T)
Short-circuit current rating:	5 kA
Connection:	2 x 3 m 180 mm flexible plastic duct

Performance graph:

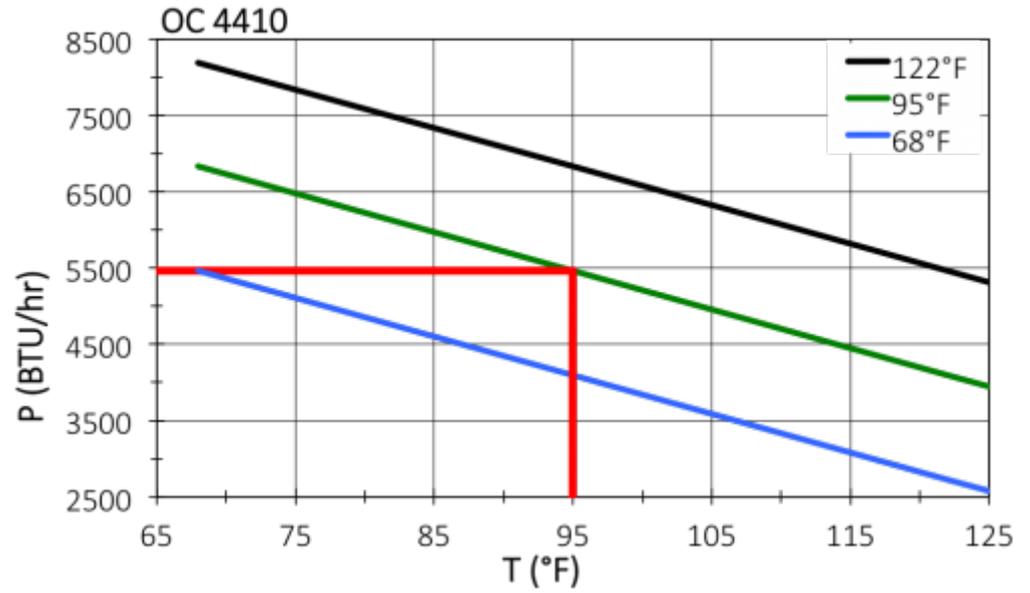

Cut out Dimensions:

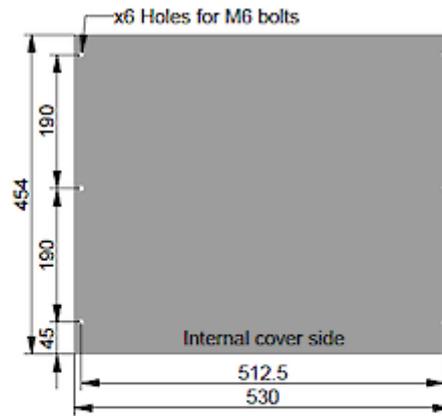

Order Information

Taric code	84158200
GTIN (EAN)	5350604321816